





DC Transformer는 입력AC220V, 출력DC24V 또는 DC110V로, Transformer에 정류회로를 일체형으로 제작하여 모터의 클러치, 조작용 램프, 릴레이 등에 사용합니다.

The DC transformer features input of AC220V and output of DC24V and 100V. It has rectification circuit and the smoothing circuit and is used for clutches, lamps and relays.

### ● Component Symbol

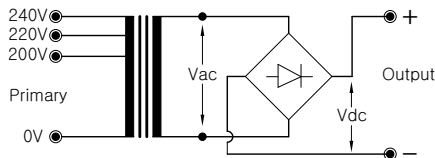

### ● Load Regulation Curve

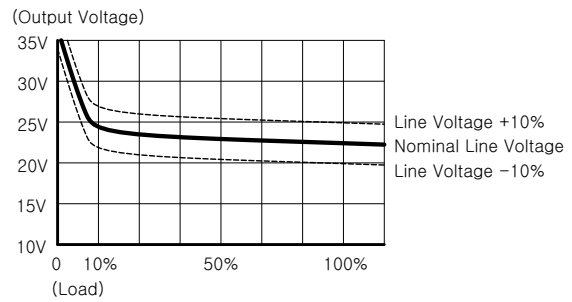

### ● Specification

| MODEL NO.     | SPECIFICATIONS |         | CAPA. (VA) | CURR. (A) | DIMENSIONS (mm) |     |     |      |      |       |       |      |          | WEIGHT (kg) |
|---------------|----------------|---------|------------|-----------|-----------------|-----|-----|------|------|-------|-------|------|----------|-------------|
|               | PRI.(V)        | SEC.(V) |            |           | W               | H   | D   | a    | b    | c     | d     | Ø1   | Ø2       |             |
| WYDC-22450AP  | 0-220          | DC 24V  | 50         | 2.1A      | 80              | 100 | 87  | 53.4 | 42   | 66.5  | 53.5  | Ø3.6 | 5 x 12   | 1.75        |
| WYDC-224100AP |                |         | 100        | 4.15A     | 103             | 119 | 107 | 72   | 53.8 | 85.5  | 62.5  | Ø3.6 | 6 x 12   | 2.70        |
| WYDC-224150AP |                |         | 150        | 6.25A     | 110             | 130 | 104 | 76.5 | 57.9 | 87.2  | 65.4  | Ø3.6 | 5.5 x 10 | 3.85        |
| WYDC-224200AP |                |         | 200        | 8.33A     | 120             | 138 | 114 | 84   | 64.9 | 95.2  | 75.4  | Ø3.6 | 5.5 x 10 | 5.12        |
| WYDC-224300AP |                |         | 300        | 12.5A     | 140             | 156 | 123 | 97.9 | 83   | 107.7 | 81.9  | Ø3.6 | 6 x 12   | 7.30        |
| WYDC-211500AP |                | DC 110V | 500        | 4.5A      | 140             | 156 | 123 | 97.9 | 83   | 107.7 | 81.9  | Ø3.6 | 6 x 12   | 7.30        |
| WYDC-2111KAP  |                |         | 1K         | 9.1A      | 160             | 183 | 156 | 114  | 95.9 | 133.5 | 101.7 | Ø3.6 | 6 x 13   | 12.60       |

※ 기타사양은 주문에 의함.

### ● Dimension

