



● Features


- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- RoHS Compliant

● Specifications


ITEM	MODEL	SYMBOL	WYNFS40T2A	WYNFS50T2A	WYNFS60T2A	WYNFS80T2A	WYNFS100T2A	WYNFS120T2A	WYNFS150T2A
Rated Voltage	V		250Vac						
Rated Current	A		40A	50A	60A	80A	100A	120A	150A
Frequency	Hz		50 / 60						
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)						
Insulation Resistance	MΩ		DC 100MΩ at the 500Vdc						
Leakage Current	mA		≤8.5mA at the 250Vac						
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]						
Operating Humidity	RH		35 ~ 85%RH						
Weight	kg		1.2				2.2		

※ Derating Curve of page 519



● Circuit Diagram

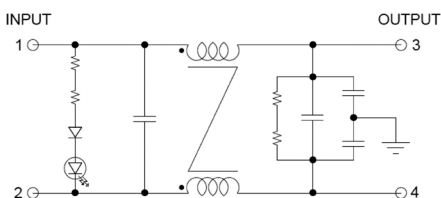


● Terminal



● Characteristics

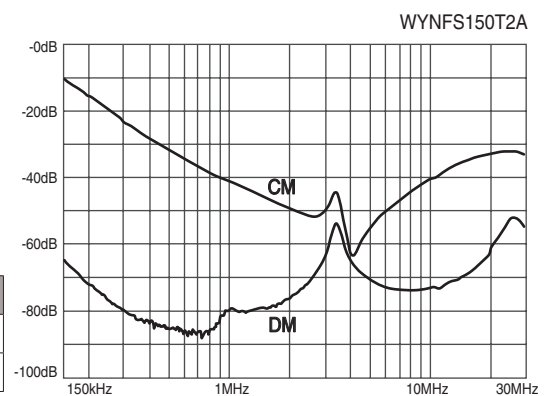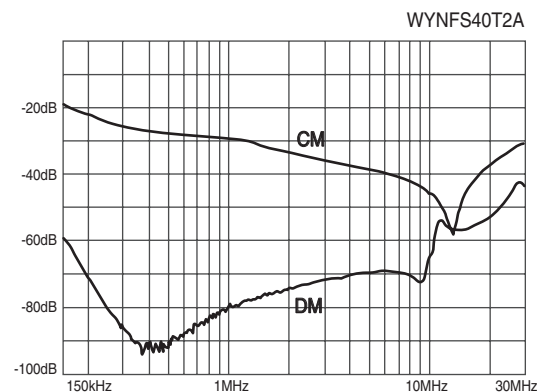

● Dimension

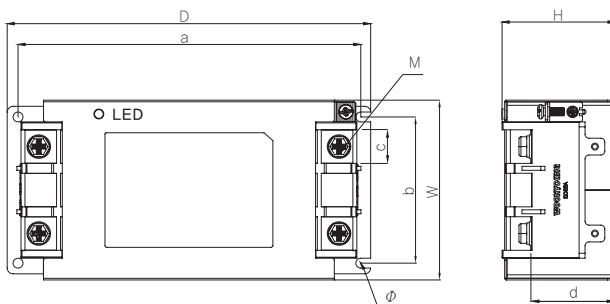

MODEL	W	H	D	a	b	c	d	M	Ø
WYNFS40 ~ 80T2A	91	57.2	184	173.5	74	17	42.3	6	5
WYNFS100 ~ 150T2A	115	75	235.2	218	96	24	58	8	5