

UL TYPE TRANSFORMER

WYES[®]
산업용변압기

WY41-UL Series WT Type

UL[®] US CE RoHS


UL 인증

단상 복권형으로 일반 전원 공급용 제품이며 전 규격을 UL[®] CE 인증 받아 신뢰성과 안전성을 동시에 확보한 제품입니다.

The product, which is a single phase isolation transformer general electric source, has been UL[®] CE certified for its proven reliability and safety.



• Circuit Diagram



● Standard & Approval


- UL 5085-1/2
- UL 1059(Terminal Block)
- IEC 61558
- UL Cer. No : E349195

● Specifications


Insulation Class H															
MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)										WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	a	b	c	d	e	Ø	M	
WY41—100UL	WT	①380 ②400 ③415 ④440 ⑤460 ⑥480	①100 ②110 ③115 ④120	100	98.4	105.9	113	72	92	98.4	113	7	6 x 12	3.5	3.23
WY41—200UL				200	120	121.5	114	84	95	120	114	10	5.5 x 10	4	4.95
WY41—300UL				300	140	136.5	126.2	97.9	106	140	126.2	10	6 x 12	4	7.25
WY41—500UL				500	160.2	161.1	146	114	124	160.2	146	10	6 x 13	4	10.70
WY41—750UL				750	160.2	161.1	156	114	134	160.2	156	10	6 x 13	4	12.30
WY41—1KUL				1K	184	188	150	133.8	122	184	150	10	7 x 14	4	16.65
WY41—1.5KUL				1.5K	184	188	170	133.8	142	184	170	16	7 x 14	6	20.75
WY41—2KUL				2K	219	226	169	180	135	219	172	16	7 x 15	6	26.80
WY41—3KUL				3K	243	247	192	180	165	243	192	16	9 x 19	6	40.20
WY41—5KUL				5K	270	269	200	180	170	270	200	16	9 x 19	6	54.00

※ 1차, 2차 전압은 주문시 선택

● Dimension

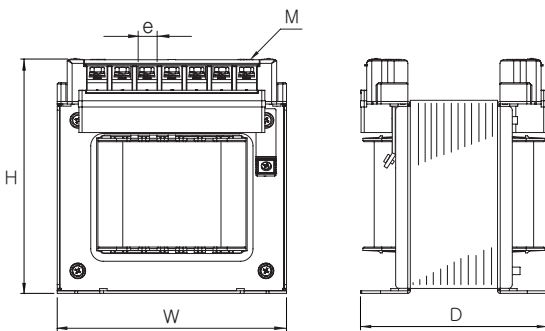

● Terminal



100VA : Max 6, Min 3.5
200VA~1kVA : Max 9, Min 4
1.5~5kVA : Max 15, Min 6
7.5kVA : Max 23, Min 6
10kVA : Max 25, Min 6

트랜스포머
REACTOR
리액터
무전압릴레이
SSR
전력조정기
TPR
스위칭파워
SMPs
노이즈필터
N/F
하모닉필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD=GGFR
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
선풍팬
SHUNT=FAN