

NOISE FILTER

1Ø 250V 보급형 General Type



● Features


- 2 Mounting Option
 - WYF****D : Din Rail Mounting
 - WYF**** : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz~30MHz
- Low Leakage
- RoHS Compliant
- KC(안전인증)
- Approved by HH03009-10002C
- UL(규격인증)

● Specifications


ITEM	MODEL	SYMBOL	WYFS06T1A(D)	WYFS10T1A(D)	WYFS15T1A(D)	WYFS20T1A(D)	WYFS30T1A(D)
Rated Voltage	V		250				
Rated Current	A		6	10	15	20	30
Frequency	Hz		50/60				
Dielectric Withstand	V		2000Vac for 1 minute or 1075Vdc for 1 minute				
Insulation Resistance	MΩ		300				
Leakage Current	mA		≤2,5mA at the 250Vac				
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]				
Operating Humidity	RH		35~85%RH				
Weight	kg		0,3				

※ "D" : DIN-Rail type of page 184 / Derating Curve of page 103


● Circuit Diagram

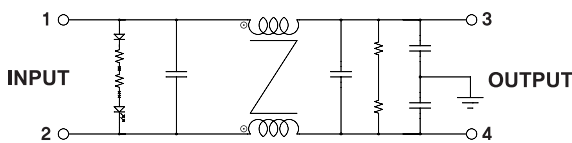



● Terminal



● Characteristics








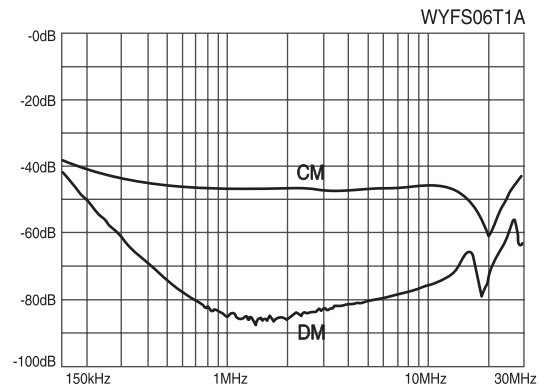


● Dimension

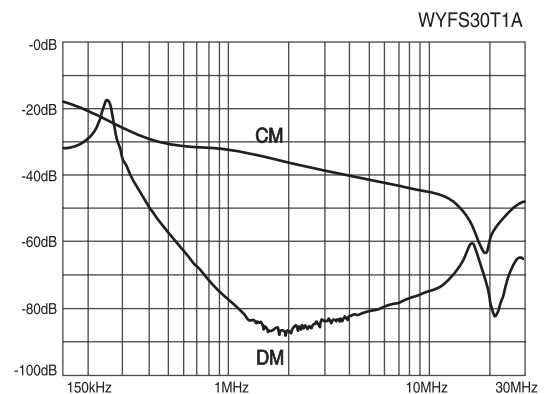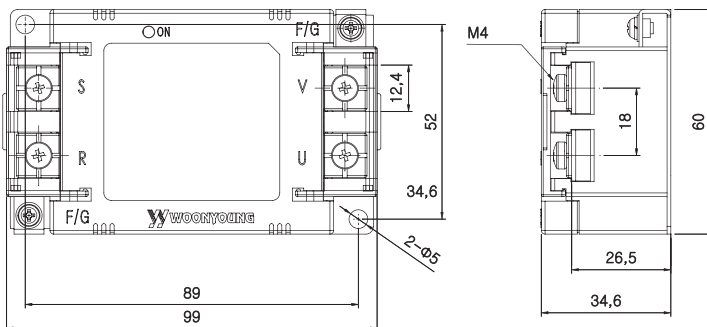

트랜스포머
REACTOR
리액터
무전선블레이
SSR
전력조정기
TPR
스위칭파워
SMPs
노이즈 필터
H/F
하모닉 필터
SPD
서지보호기
RELAY
보통계전기
E/LD=GF
R
영상변류기
ZCT
METER
판넬메타
CT=VT
계기용변성기
SHUNT=FA
선트팬









● Characteristics

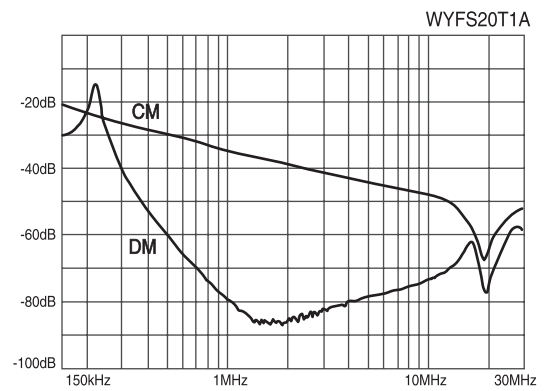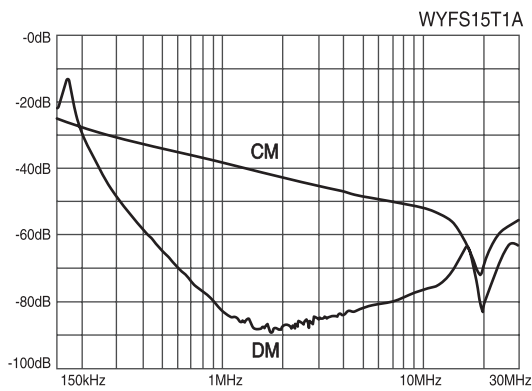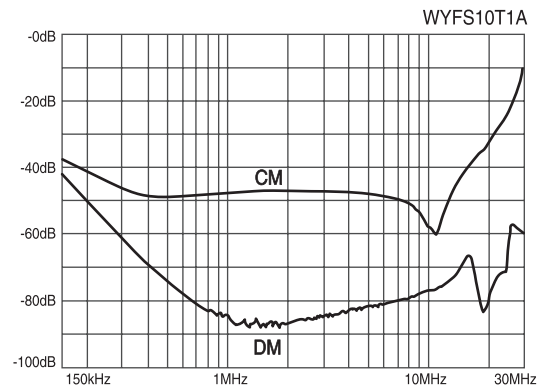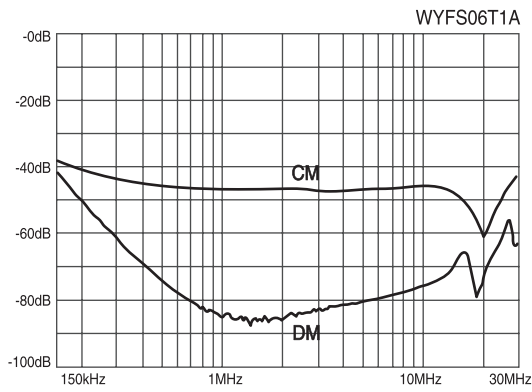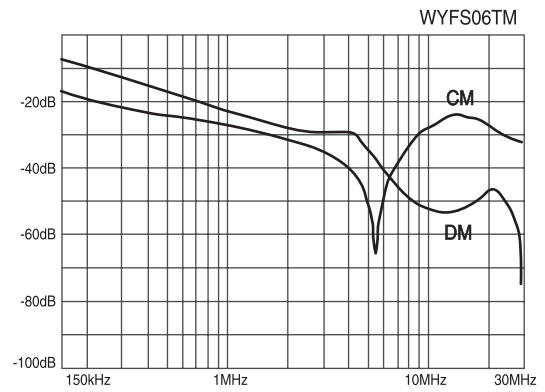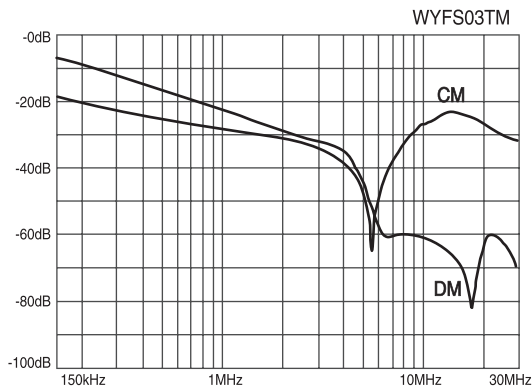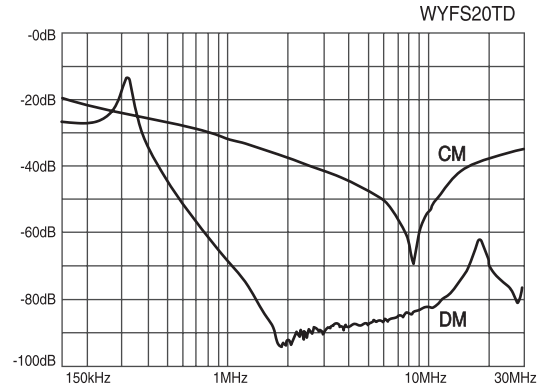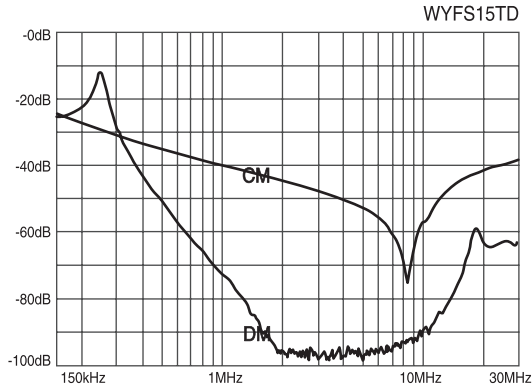

※ CM : Common mode, DM : Differential mode

트랜스포머
REACTOR
리액터
무전선블레이
SSR
전력조정기
TPR
스위칭파워
SMP
노이즈 필터
N/F
하모닉 필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD=GF
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
선풍기
SHUNT=FAN

● Characteristics

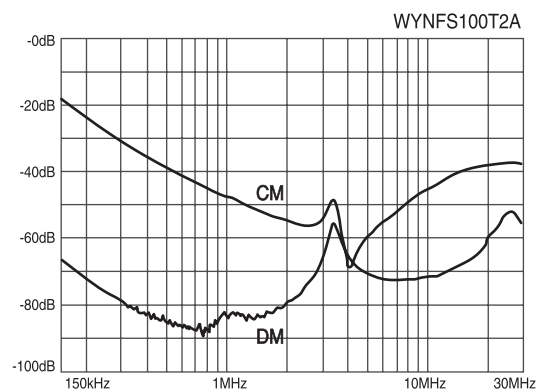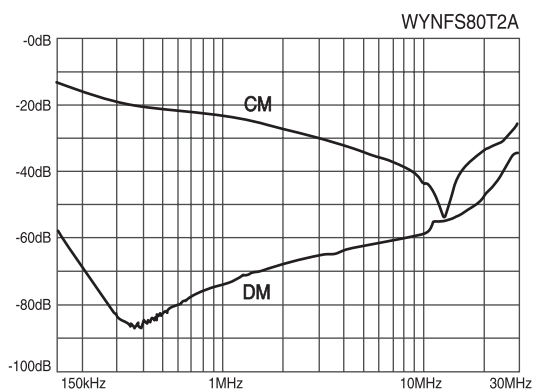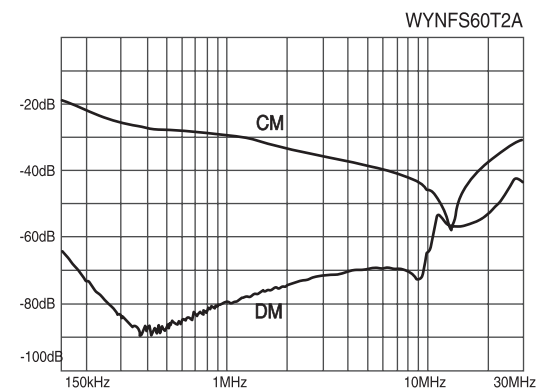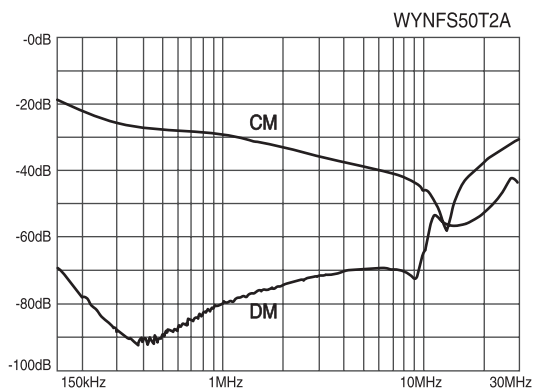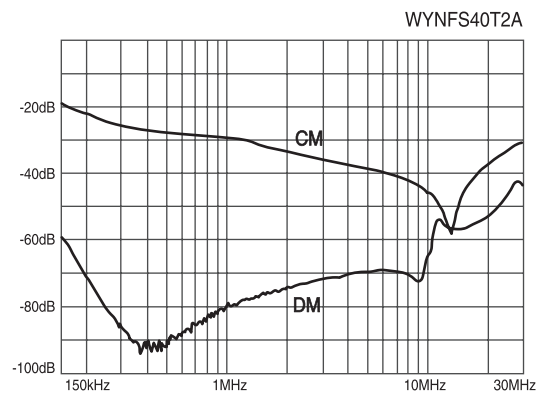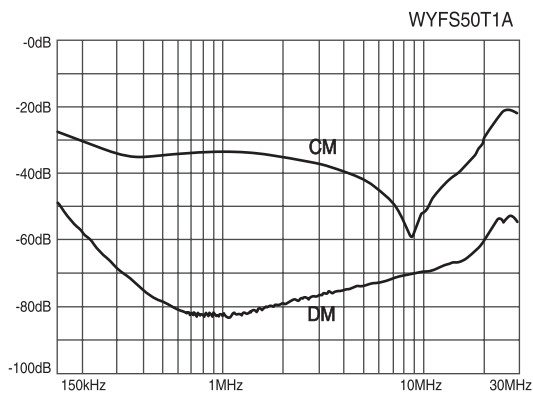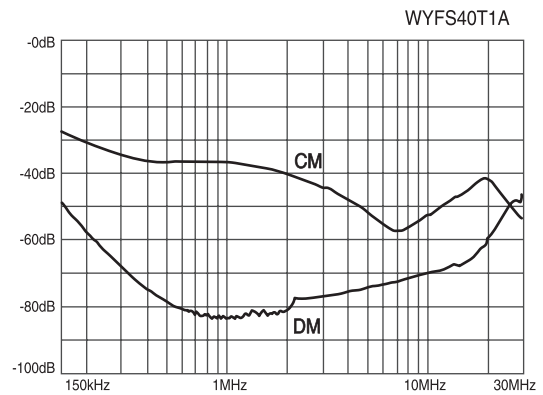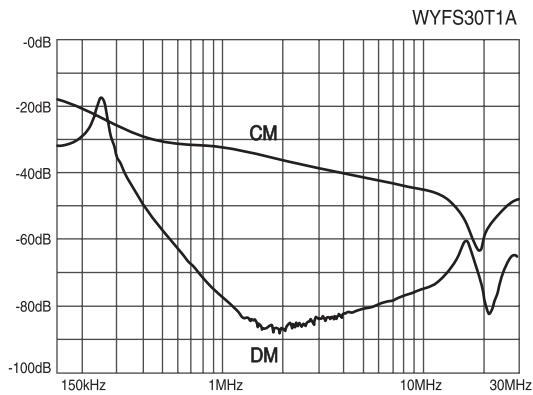

※ CM : Common mode, DM : Differential mode