

UL 인증



● Features


- 2 Mounting Option
 - WYF****D : Din Rail Mounting
 - WYF**** : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- UL Cer. No : E521164

● Specifications


ITEM	MODEL	SYMBOL	WYFS40T1A(D)	WYFS50T1A(D)
Rated Voltage	V		250	
Rated Current	A		40	50
Frequency	Hz		50 / 60	
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)	
Insulation Resistance	MΩ		500MΩ at the 500VDC	
Leakage Current	mA		≤1.5mA at 250VAC	
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]	
Operating Humidity	RH		35 ~ 85%RH	
Weight	kg		0.5	

※ Derating Curve of page 519


● Circuit Diagram

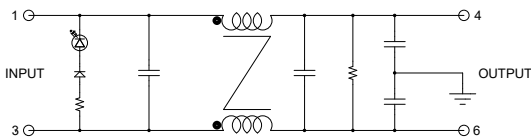

● Terminal



● Dimension

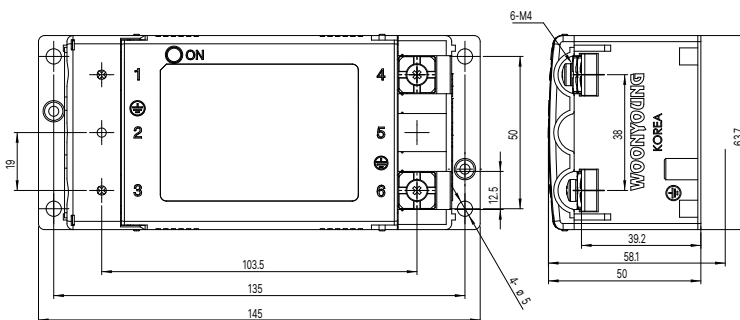

※ DIN Rail Type of page 638

● Characteristics

