



● Features


- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Small Size & Compact and Light Weight
- Low Leakage
- KC(안전인증) Approved by HK03001-17006A

● Specifications


ITEM	MODEL	SYMBOL	WYFS03A2	WYFS06A2
Rated Voltage	V		250	
Rated Current	A		3	6
Frequency	Hz		50 / 60	
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)	
Insulation Resistance	MΩ		500MΩ at the 500VDC	
Leakage Current	mA		≤0.3mA at 250VAC	
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]	
Operating Humidity	RH		35 ~ 85%RH	
Weight	g		40	

※ Derating Curve of page 519

● Circuit Diagram

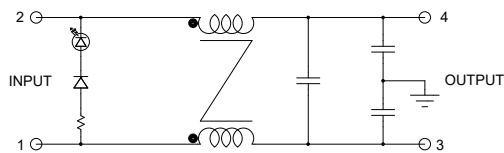

● Dimension

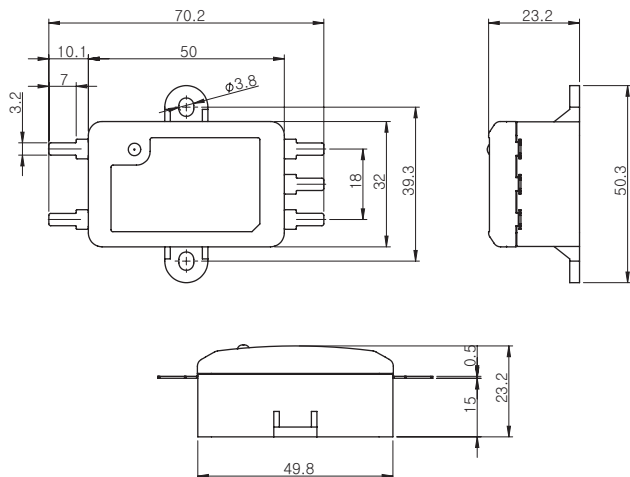

● Characteristics

