1Ø 250V 경제형 DIN Rail & Terminal Type

RoHS

UL 인증





Features


- 2 Mounting : Din Rail & Screw
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- Low Cost
- RoHS Compliant
- UL Cer. No : E521164

Specifications


ITEM \ MODEL	SYMBOL	WYFS06TD	WYFS10TD	WYFS15TD	WYFS20TD
Rated Voltage	V	250			
Rated Current	A	6	10	15	20
Frequency	Hz	50 / 60			
Dielectric Withstand	V	1500VAC or 2250VDC for 1 minute(Line-Case)			
Insulation Resistance	MΩ	500MΩ at the 500VDC			
Leakage Current	mA	≤1.1mA at the 250Vac			
Operating Temperature	°C	−25°C ~ +100°C [Refer to Derating Curve TYPE−1]			
Operating Humidity	RH	35 ~ 85%RH			
Weight	kg	0.1			

※Derating Curve of page 519

Circuit Diagram

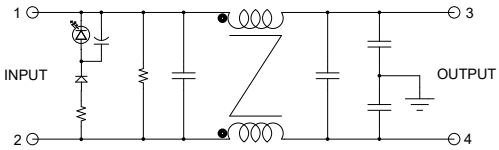



Terminal




Max 7 , Min 3.5

Characteristics

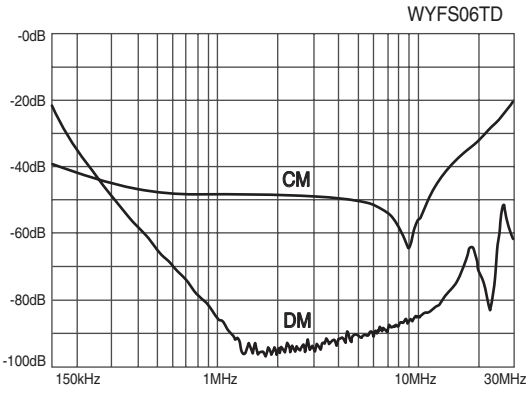

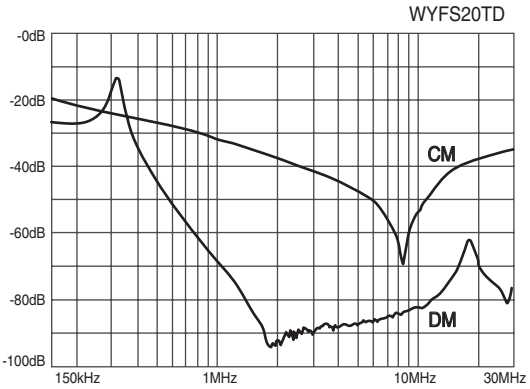


Dimension

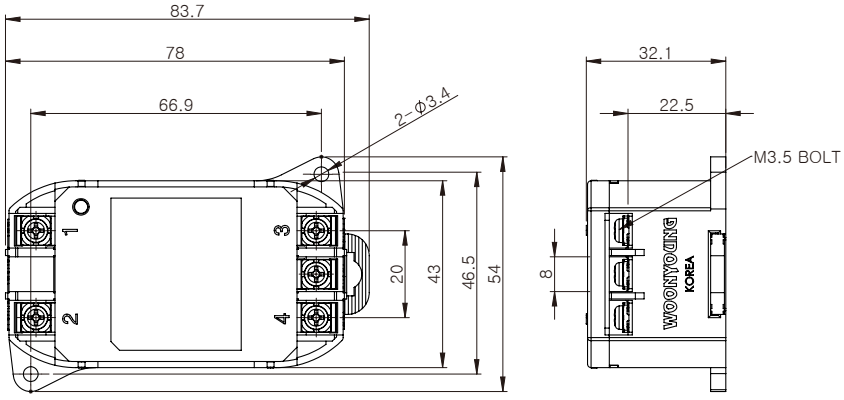


1Ø 250V Characteristics


WYFS01P1

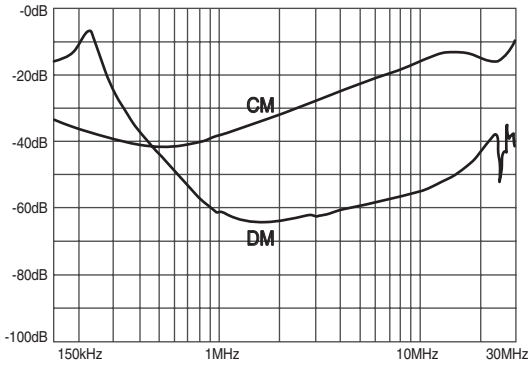


WYFS02P1

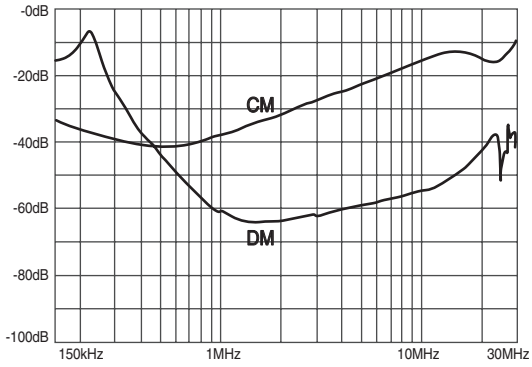


WYFS03P1

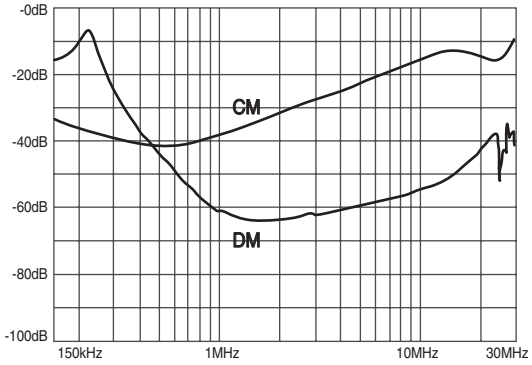


WYFS06P1

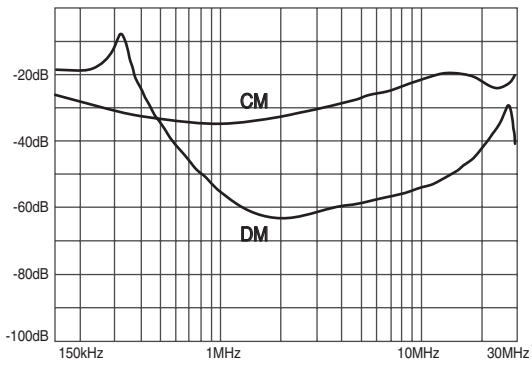


WYFS01P3

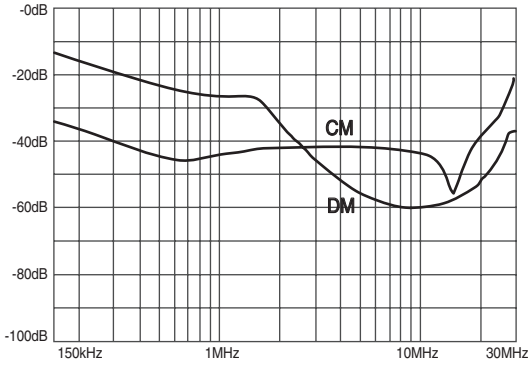


WYFS02P3

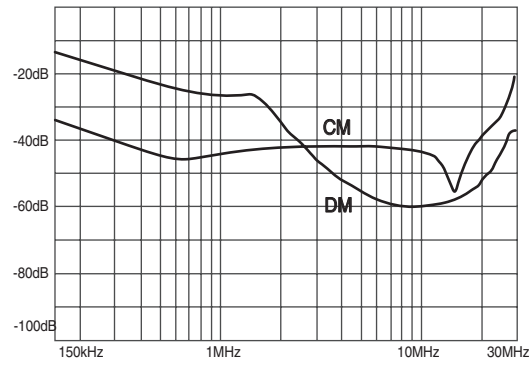

WYFS03P3

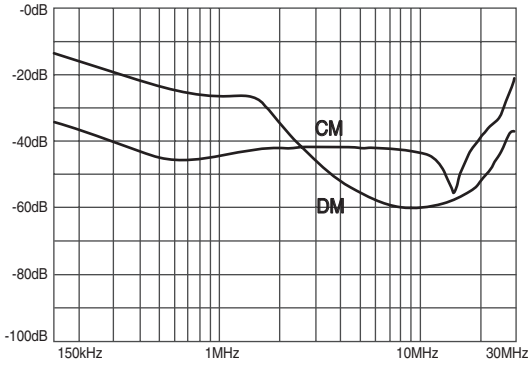


WYFS06P3

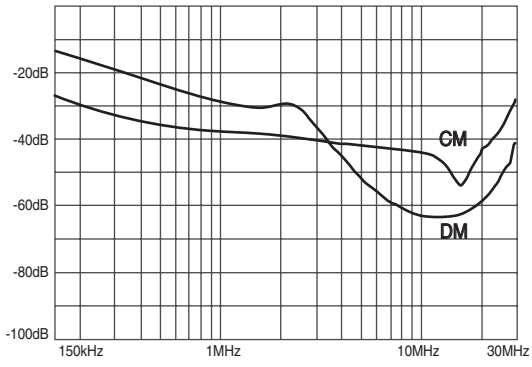


※CM : Common mode, DM : Differential mode

Characteristics


WYFS03L1

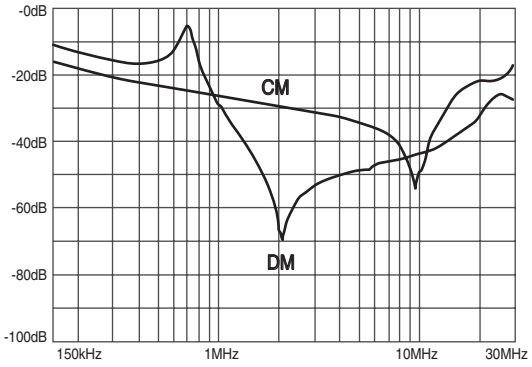


WYFS06L1

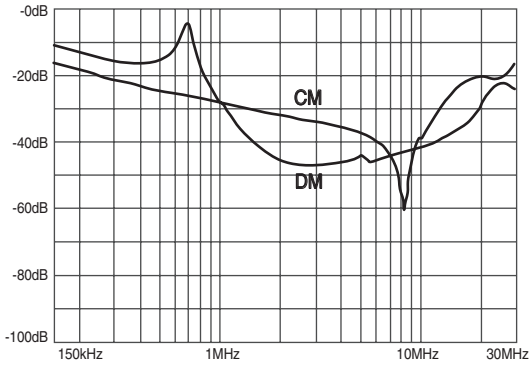


WYFS03A3

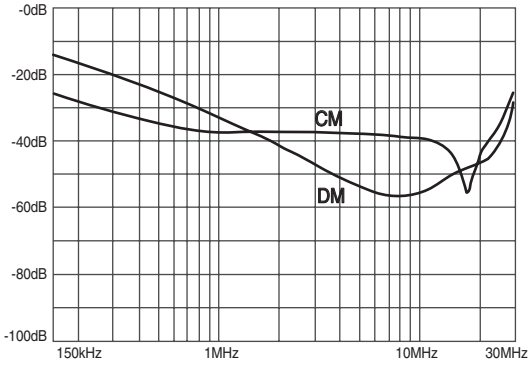


WYFS06A3

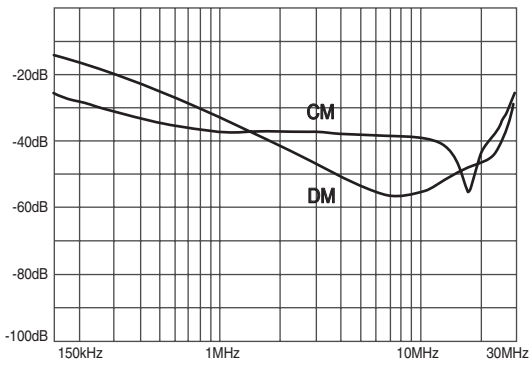


WYFS03A2

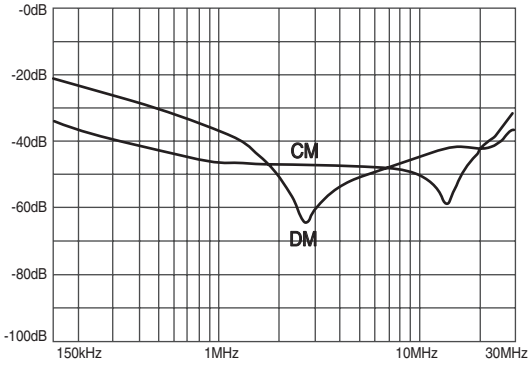


WYFS06A2

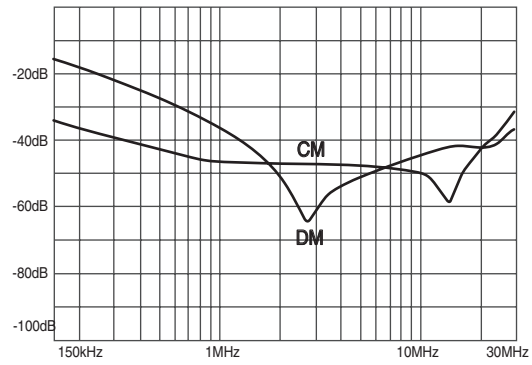

WYFS06TD

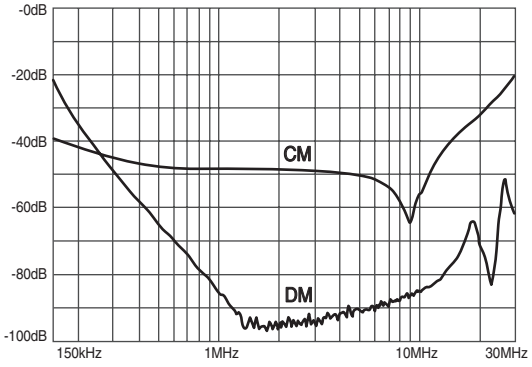


WYFS10TD

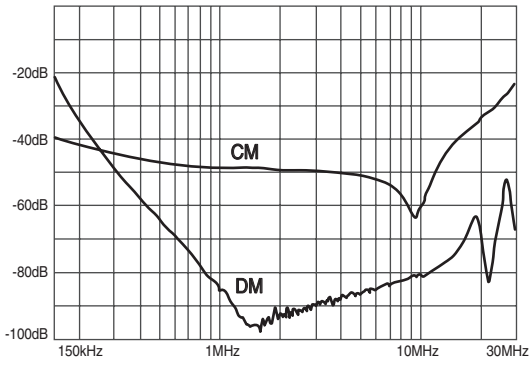


※CM : Common mode, DM : Differential mode

Characteristics


WYFS15TD

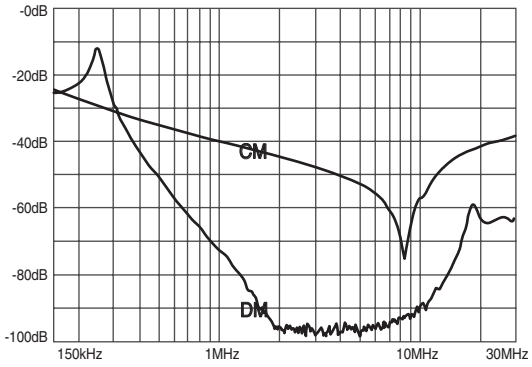


WYFS20TD

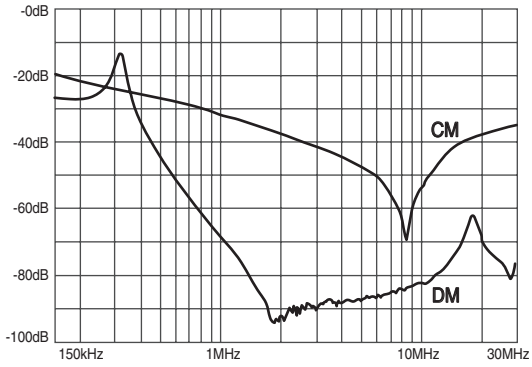


WYFS03TM

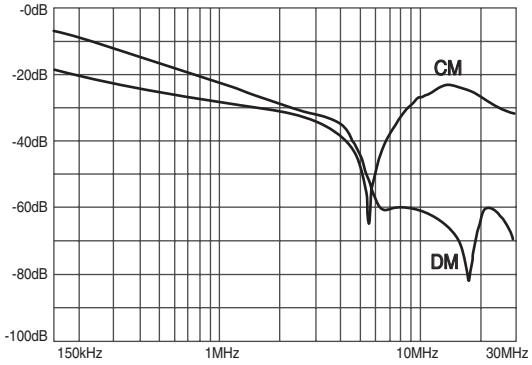


WYFS06TM

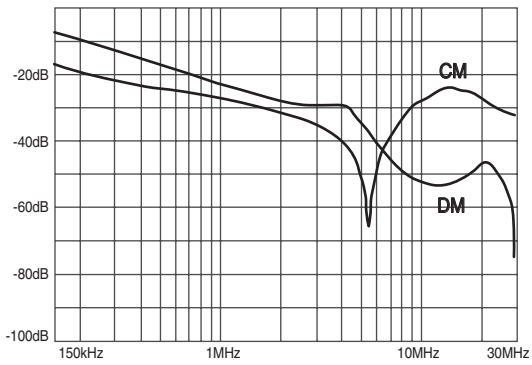


WYFS06T1A

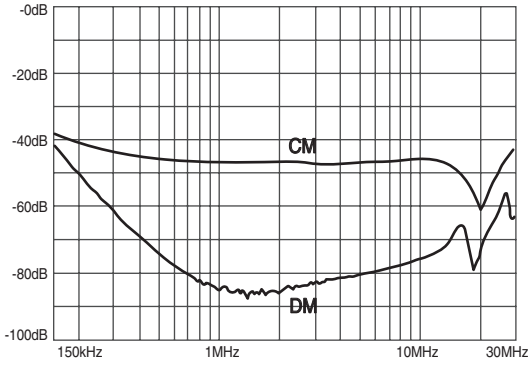


WYFS10T1A

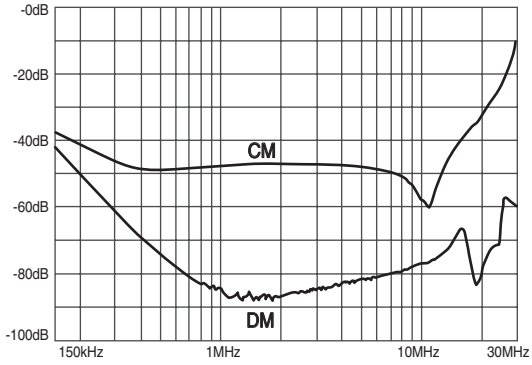

WYFS15T1A

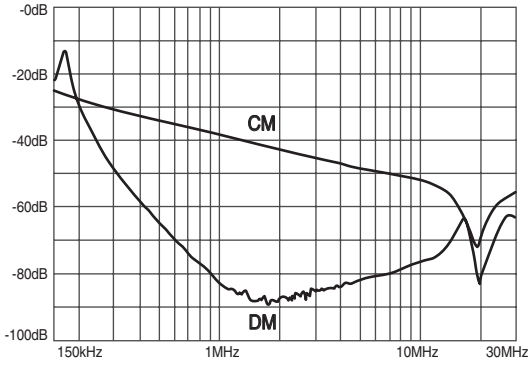


WYFS20T1A

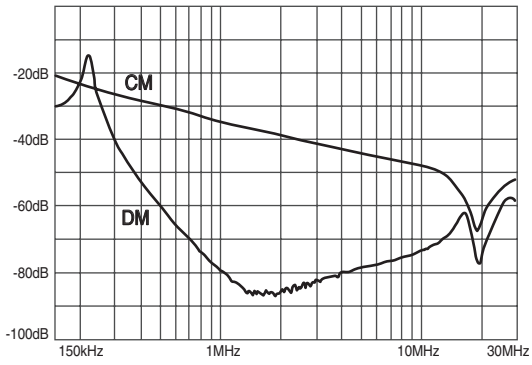


※CM : Common mode, DM : Differential mode

Characteristics


WYFS30T1A

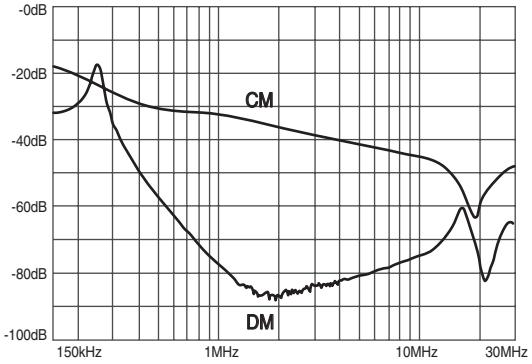


WYFS40T1A

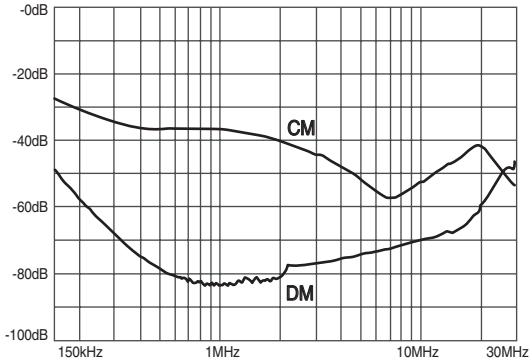


WYFS50T1A

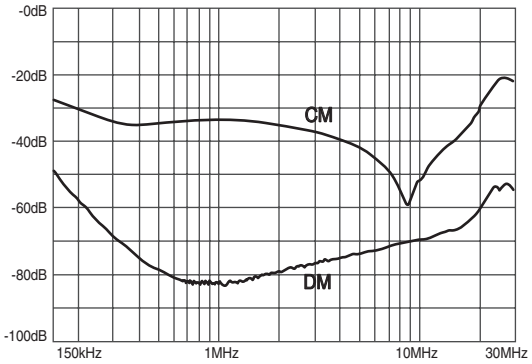


WYNFS40T2A

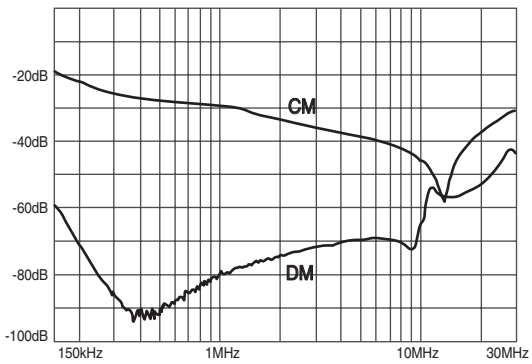


WYNFS50T2A

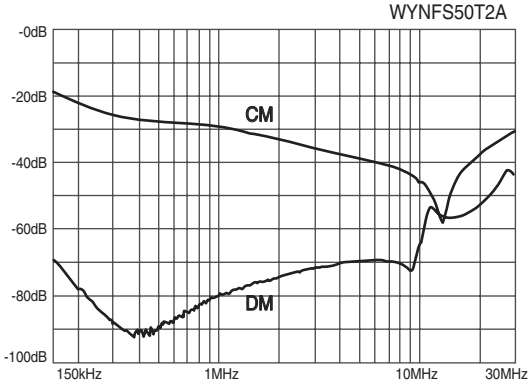


WYNFS60T2A

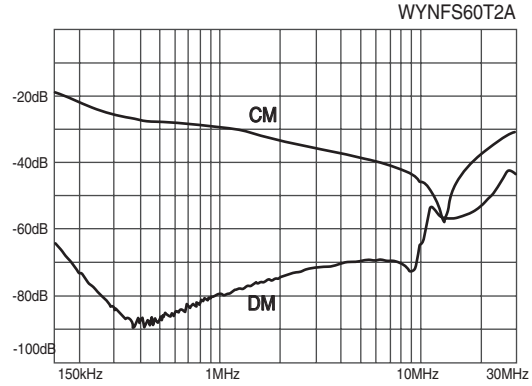

WYNFS80T2A

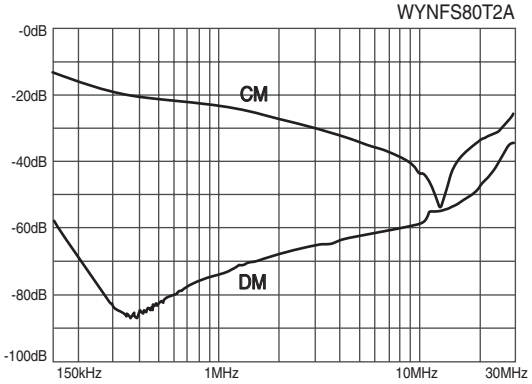


WYNFS100T2A

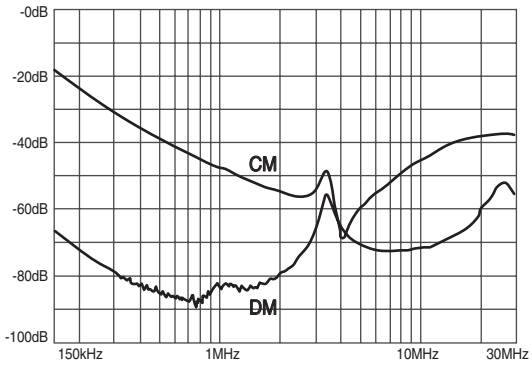


※CM : Common mode, DM : Differential mode

Characteristics


WYNFS120T2A

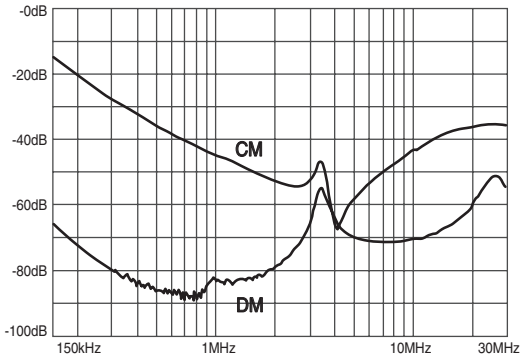


WYNFS150T2A

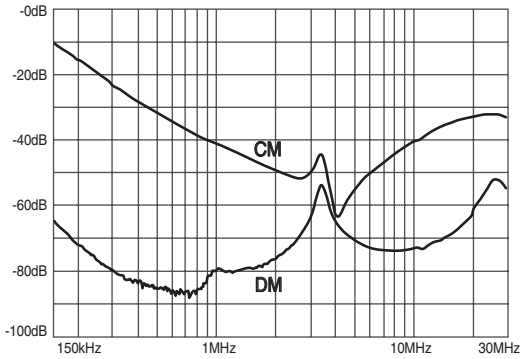


WYFS60T2A

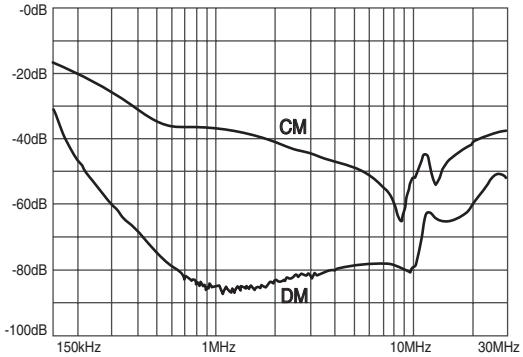


WYFS80T2A

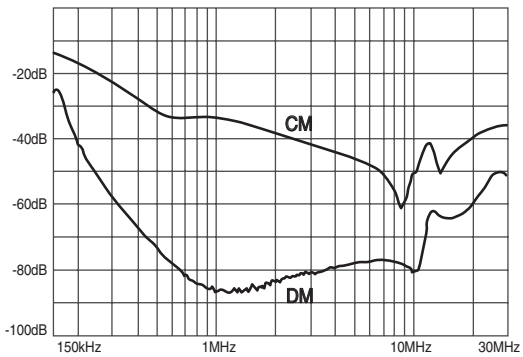


WYFS100T2A

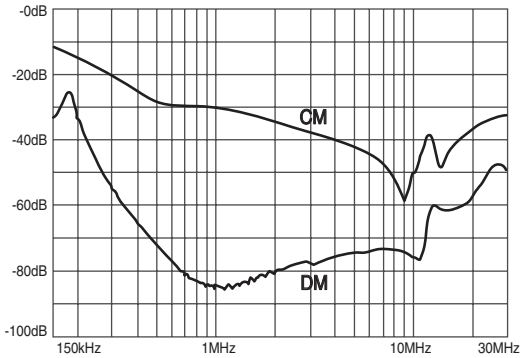


WYFS120T2A

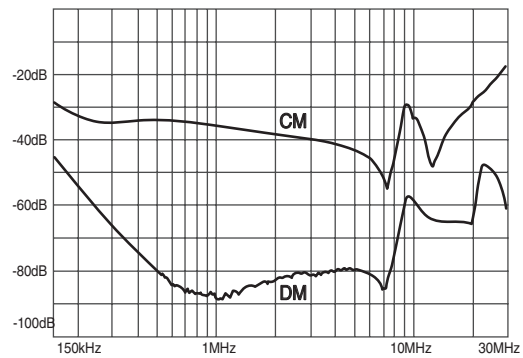

WYFS150T2A

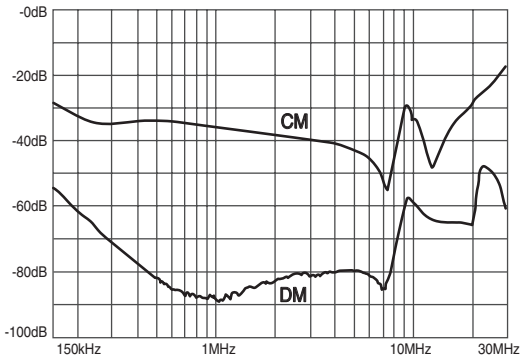


WYFS200T2A

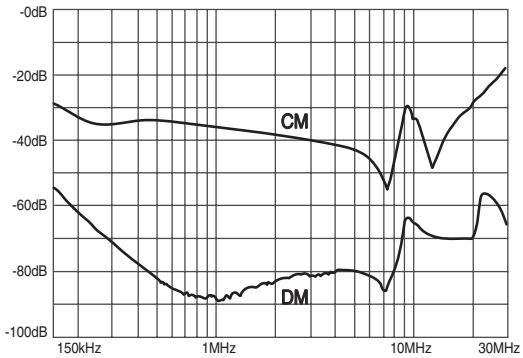


※CM : Common mode, DM : Differential mode

Characteristics


WYFSH06T1A

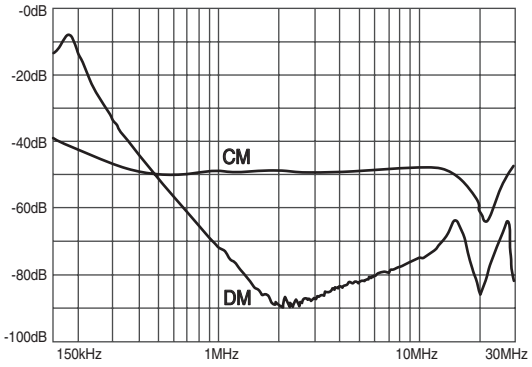


WYFSH10T1A

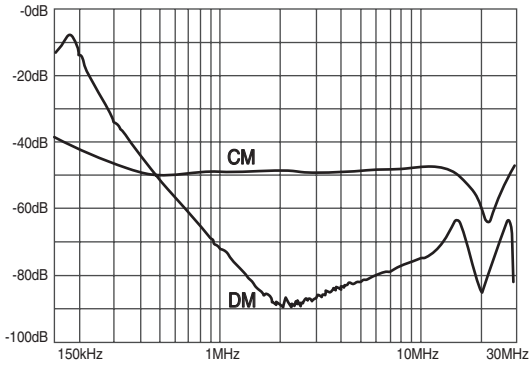


WYFSH15T1A

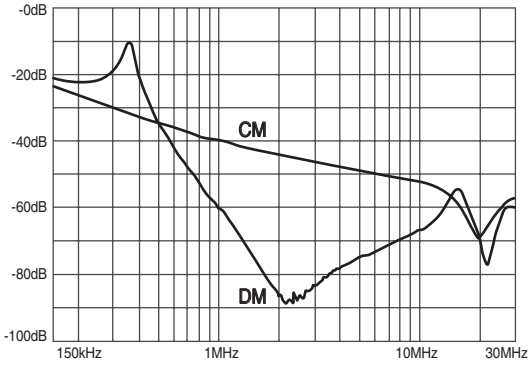


WYFSH20T1A

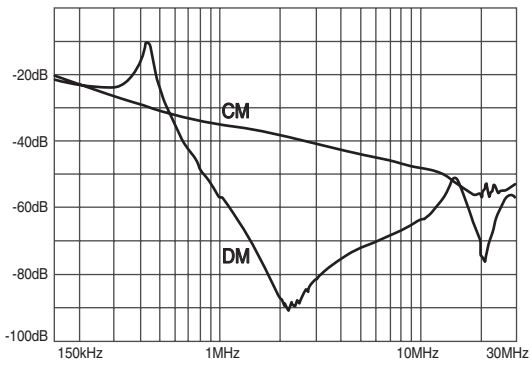


WYFSH30T1A

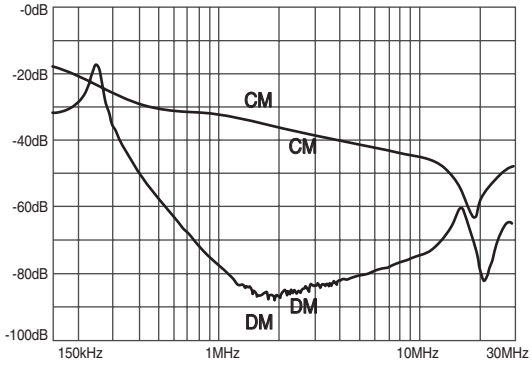


WYFD06T1A

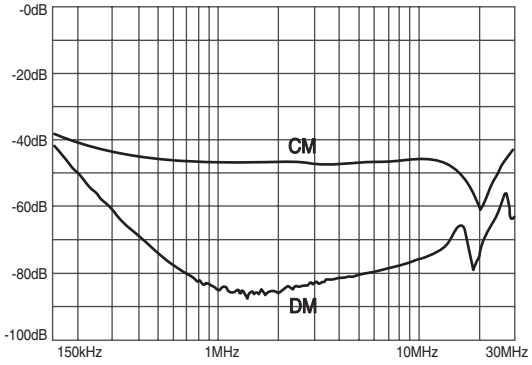

WYFD10T1A

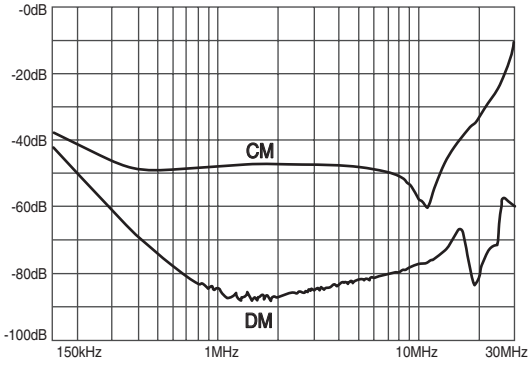


WYFD15T1A

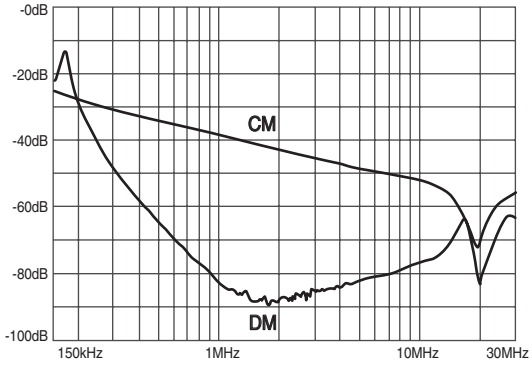


※CM : Common mode, DM : Differential mode

Characteristics


WYFD20T1A

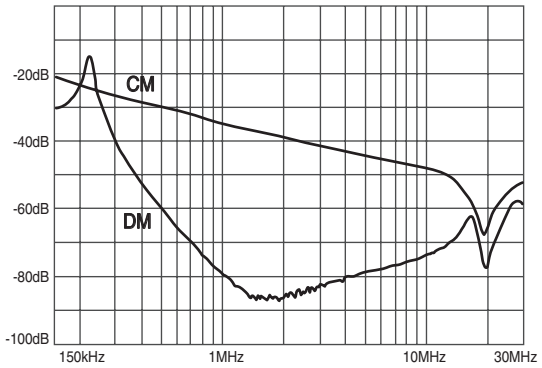


WYFD30T1A

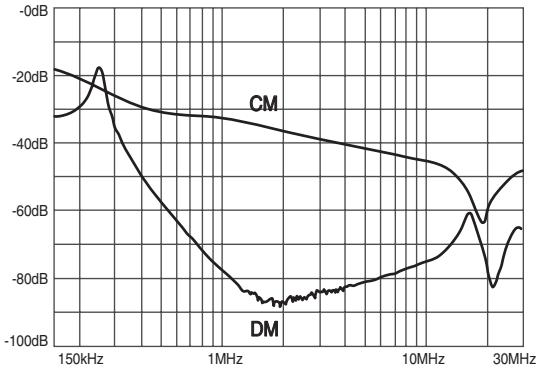


WYFDH06T1A

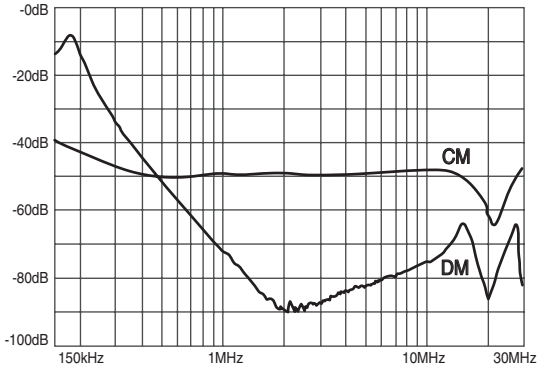


WYFDH10T1A

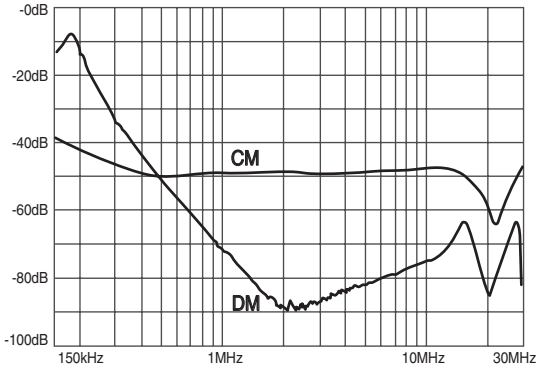


WYFDH15T1A

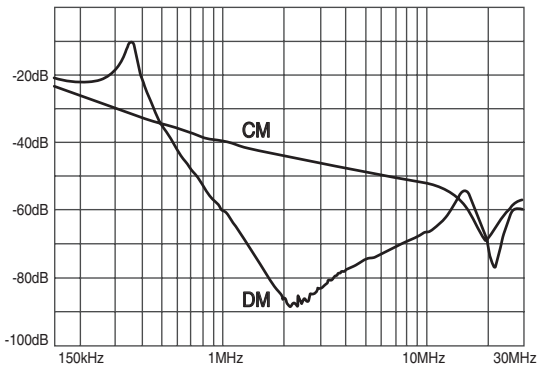


WYFDH20T1A

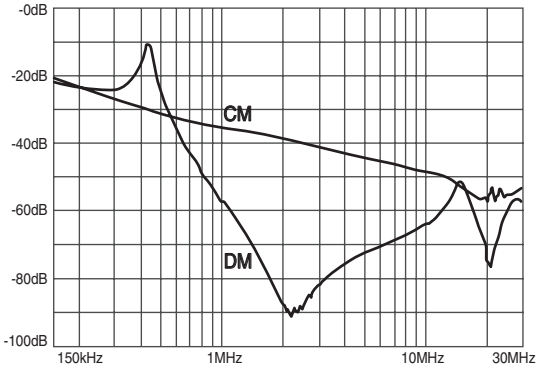

WYFDH30T1A

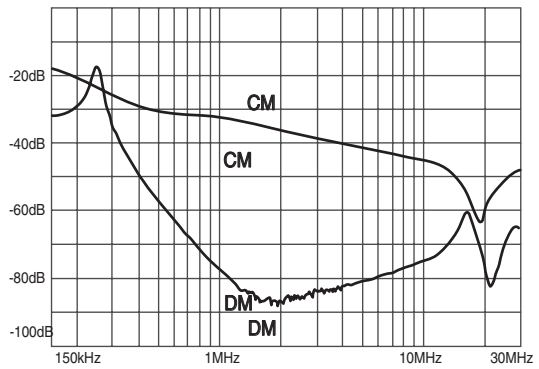


WYFDU06T1A

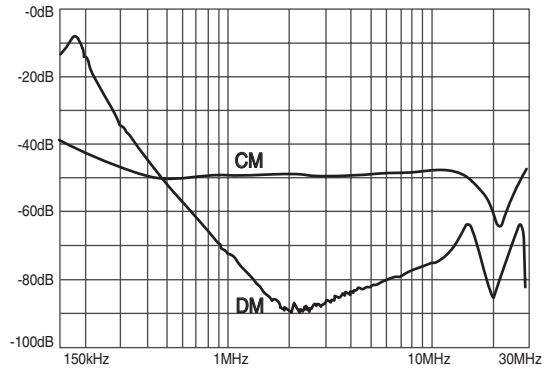


Characteristics


WYFDU10T1A

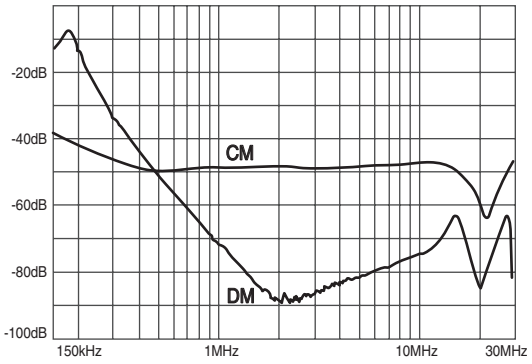


WYFDU15T1A

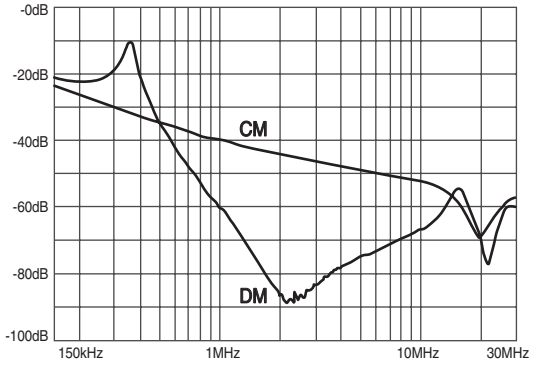

WYFDU20T1A

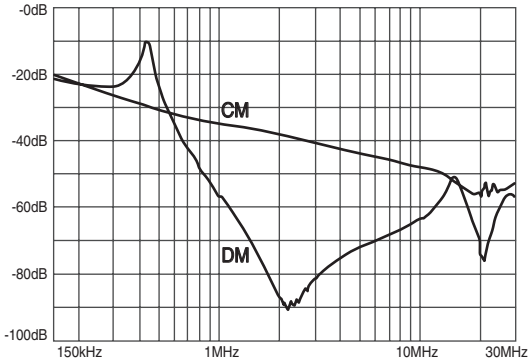

WYFDU30T1A

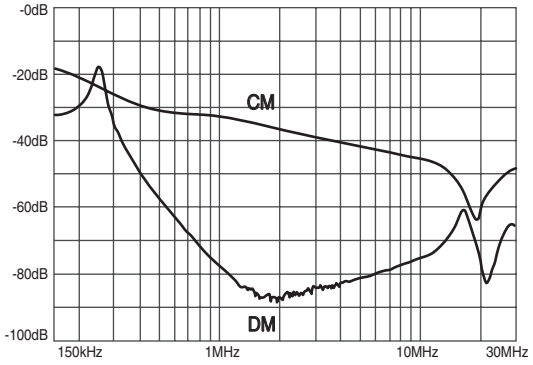

※CM : Common mode, DM : Differential mode