


UL TYPE TRANSFORMER

WY3P42D-UL Series WT Type




UL 인증



삼상 복관형으로 일반 전원 공급용 제품이며 전 규격을 UL, CE 인증 받아 신뢰성과 안전성을 동시에 확보한 제품입니다.

The product, which is a three phase isolation transformer general electric source, has been UL, CE certified for its proven reliability and safety.

• Circuit Diagram



• Not applied E(Shield) : 20KUL

● Standard & Approval


- UL 5085-1/2
- UL 1059(Terminal Block)
- IEC 61558

● Specifications


MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)									WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	a	b	c	∅	E(≒)	M	
WY3P42D-500UL	WT	△	△N	0.5k	190	172	134	99	130	12	6.6 x 16	M4	M4	13.00
WY3P42D-1KUL				1k	235	210	144	113.5	120	12	7 x 14.5	M4	M4	18.60
WY3P42D-1.5KUL				1.5k	275	248	165	130	120	16	9 x 19	M4	M6	20.00
WY3P42D-2KUL				2k	275	248	165	130	120	16	9 x 19	M4	M6	30.50
WY3P42D-3KUL				3k	332	292	190	160	180	16	10.5 x 20.5	M4	M6	45.40
WY3P42D-5KUL				5k	332	292	190	185	180	16	10.5 x 20.5	M4	M6	58.30
WY3P42D-6KUL				6k	375	319.5	236	180	208	16	12 x 20	M4	M6	73.00
WY3P42D-7.5KUL				7.5k	375	319.5	236	180	208	16	12 x 20	M4	M6	81.70
WY3P42D-10KUL				10k	390	339	236	208	180	20	12 x 20	M4	M6	92.00
WY3P42D-15KUL				15k	425	368	260	196	205	20	14 x 40	M4	M6	101.50

※ 1차, 2차 전압은 주문시 선택
※ 단자 치수 ("c", "M") 는 참조 사항으로 변경 될 수 있습니다.

● Dimension

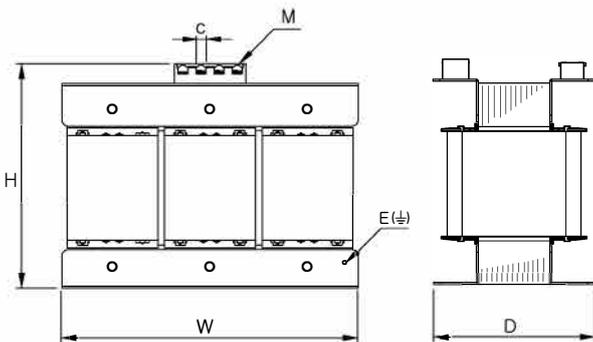

● Terminal



500VA~1kVA : Max 12.6, Min 4
1.5kVA~7.5kVA : Max 17.2, Min 6
10kVA~15kVA : Max 18.2, Min 6

트랜스포머
REACTOR
리액터
무전압릴레이
SSR
전력조정기
TPR
스위칭파워
SMPs
노이즈 필터
N/F
하모닉 필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD=GF
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
선드랜
SHUNT=FAN