


UL TYPE TRANSFORMER

WY3P42-UL Series WT Type




UL 인증



삼상 복권형으로 일반 전원 공급용 제품이며 전 규격을 UL US CE 인증 받아 신뢰성과 안전성을 동시에 확보한 제품입니다.

The product, which is a three phase isolation transformer general electric source, has been UL US CE certified for its proven reliability and safety.

• Circuit Diagram



● Standard & Approval


- UL 5085-1/2
- UL 1059(Terminal Block)
- EN 61558

● Specifications


MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)								WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	a	b	c	Ø	M	
WY3P42-500UL	WT	①380 ②400 ③415 ④440 ⑤460 ⑥480	①200 ②208 ③220	500	190	172	135	99	130	12	6,6 x 16,3	4	13,00
WY3P42-1KUL				1k	235	210	144	113,5	120	12	7 x 14,5	4	18,60
WY3P42-1,5KUL				1,5k	275	248	165	130	120	16	9 x 19	6	20,00
WY3P42-2KUL				2k	275	248	165	130	120	16	9 x 19	6	30,50
WY3P42-3KUL				3k	332	292	190	160	180	16	10,5 x 20,5	6	45,40
WY3P42-5KUL				5k	332	292	190	185	180	16	10,5 x 20,5	6	58,30
WY3P42-7,5KUL				7,5k	375	319,5	236	180	208	16	12 x 20	6	81,70
WY3P42-10KUL				10k	390	339	236	208	180	20	12 x 20	6	92,00
WY3P42-15KUL				15k	425	368	260	196	205	20	14 x 40	6	101,50
WY3P42-20KUL				20k	450	344	244	189	205	1st : 15 2nd : 10,5	14 x 35	1st : 6 2nd : 4	110,50

※ 1차, 2차 전압은 주문시 선택

● Dimension

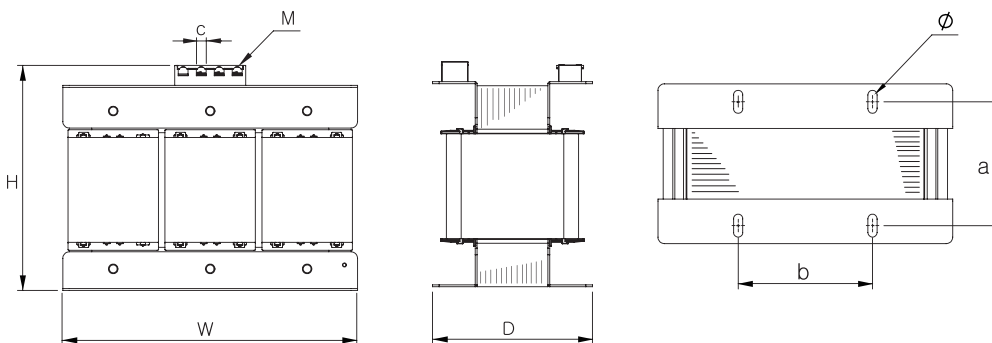

● Terminal



- 500VA~1kVA : Max 11, Min 4
- 1.5~15kVA : Max 15, Min 6
- 20kVA 1st : Max 14, Min 6
- 2st : Max 10, Min 4