

3P4W 500V



Features

본 노이즈필터는 250~500V의 계통에 적용되며 기존의 삼상 선로에만 적용하던 것을 3P4W 선로의 중성 선에도 필터를 적용하여 AVR, UPS, 의료기장비 및 기타 3상4선식 선로에 적용되는 고감쇄형(Multi-stage) 노이즈필터입니다.

This is multi stage(premium) type of noise filter which is normally used to AVR, UPS, medical equipment and 3phase-4wire system line is available to use between 250V and 500V and not only to 3wire system but also 3phase-4wire system line.


- Wide Band : High Attenuation
- Band Width : 150kHz ~ 30MHz
- RoHS Compliant
- Inverter Output Type : Model Type "C" (WYF4TH200T2C)
- WYF4TH200T2M~WYF4TH400T2M : KC(HK03001~16005A)

Specifications

ITEM	MODEL	SYMBOL	WYF4TH200T2M	WYF4TH250T2M	WYF4TH300T2M	WYF4TH400T2M	WYF4TH500T2M	WYF4TH600T2M
Rated Voltage	V					500		
Rated Current	A		200	250	300	400	500	600
Frequency	Hz				50 / 60			
Dielectric Withstand	V				2500VAC or 2800VDC for 1 minute(Line-Case)			
Insulation Resistance	MΩ				300			
Leakage Current	mA				90<at the 500 Vac>			
Operating Temperature	°C				−25°C ~ +100°C [Refer to Derating Curve TYPE-2]			
Operating Humidity	RH				35 ~ 85%RH			
Weight	kg		6.5		7.1		7.8	

※ Derating Curve of page 519

Circuit Diagram

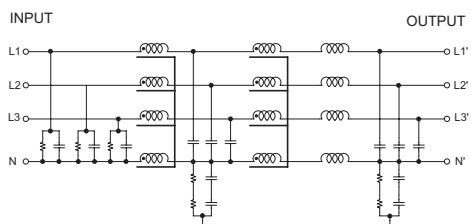

Dimension

