

UL 인증



● Features

- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- Inverter Output Type : Model Type"C"
(WYFTH300T2C)
- WYFTH300T2A, WYFTH400T2A
: KC(HH03009-10001D) (Without "C" Type)
- UL Cer. No : E521164


● Specifications

* cUL Certification


ITEM	MODEL	SYMBOL	*WYFTH300T2A WYFTH300T2C	*WYFTH400T2A WYFTH400T2C
Rated Voltage	V		500	
Rated Current	A		300	400
Frequency	Hz		50 / 60	
Dielectric Withstand	V		2500VAC or 2800VDC for 1 minute(Line-Case)	
Insulation Resistance	MΩ		300	
Leakage Current	mA		18	
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]	
Operating Humidity	RH		35 ~ 85%RH	
Weight	kg		9.5	

* Derating Curve of page 519

● Circuit Diagram

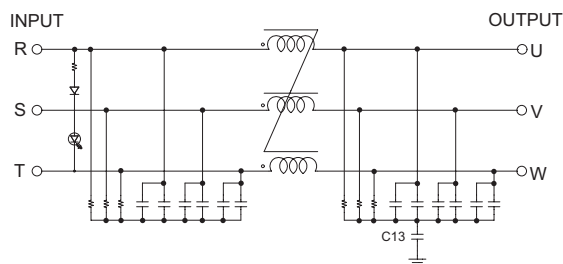

● Dimension

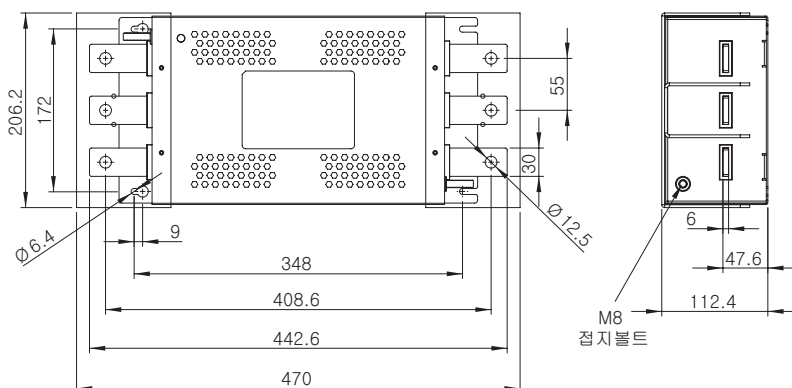

● Characteristics

