

3PHASE INSTALLING TYPE (3상 일체형) CURRENT TRANSFORMER

0.72~1.2kV (50~300A)

- Standard :KS C 1706, IEC 61869-2, JEC 1201, IEEE C 57.13



● Features

- 3Phase all in one type
- MCCB mixing type
- Square type C,T(Busbar & Cable installing type)
- Maximum voltage : 0.72~1.2kV
- Over current strength : 40In/1sec.
- Frequency : 50Hz or 60Hz
- Secondary current : 5A
- Case : Poly carbonate (PC)

● Specification

· 2CT Type

MODEL	MCCB	CT (TYPE)	Primary (A)	Secondary (A)	Class (%)	Burden (VA)	Weight (kg)
WY3CS-052S	50~100AF	2CT TYPE	75A	5A	3.0	1,25	0,32
			100A			1,25	0,32
			120A			1,25	0,32
WY3CS-052	50~100AF	2CT TYPE	50A			1,25	0,46
			60A			1,25	0,46
			75A			2,5	0,46
			100A			2,5	0,47
			120A			2,5	0,47
WY3CS-122	125AF	2CT TYPE	50A			1,25	0,48
			60A			1,25	0,48
			75A			2,5	0,49
			100A			2,5	0,49
			120A	2,5	0,49		
WY3CS-252	250AF	2CT TYPE	150A	5	0,50		
			100A	1,25	0,39		
			120A	1,25	0,39		
			150A	2,5	0,39		
			200A	2,5	0,40		
			250A	1.0		2,5	0,41
			300A			2,5	0,42

· 3CT Type

MODEL	MCCB	CT (TYPE)	Primary (A)	Secondary (A)	Class (%)	Burden (VA)	Weight (kg)
WY3CS-053S	50~100AF	3CT TYPE	75A	5A	3.0	1,25	0,42
			100A			1,25	0,42
			120A			1,25	0,42
WY3CS-053	50~100AF	3CT TYPE	50A			1,25	0,59
			60A			1,25	0,59
			75A			2,5	0,59
			100A			2,5	0,60
WY3CS-123	125AF	3CT TYPE	120A			2,5	0,60
			50A			1,25	0,66
			60A			1,25	0,66
			75A			2,5	0,66
			100A			2,5	0,67
WY3CS-253	250AF	3CT TYPE	120A	2,5	0,67		
			150A	5	0,68		
			100A	1,25	0,54		
			120A	1,25	0,55		
			150A	2,5	0,55		
			200A	1.0		2,5	0,56
			250A			2,5	0,57
			300A			2,5	0,58

3PHASE INSTALLING TYPE (3상 일체형) CURRENT TRANSFORMER




저압계기용변성기


0.72~1.2kV (50~300A)

● Dimension


- WY3CS-052S, WY3CS-053S

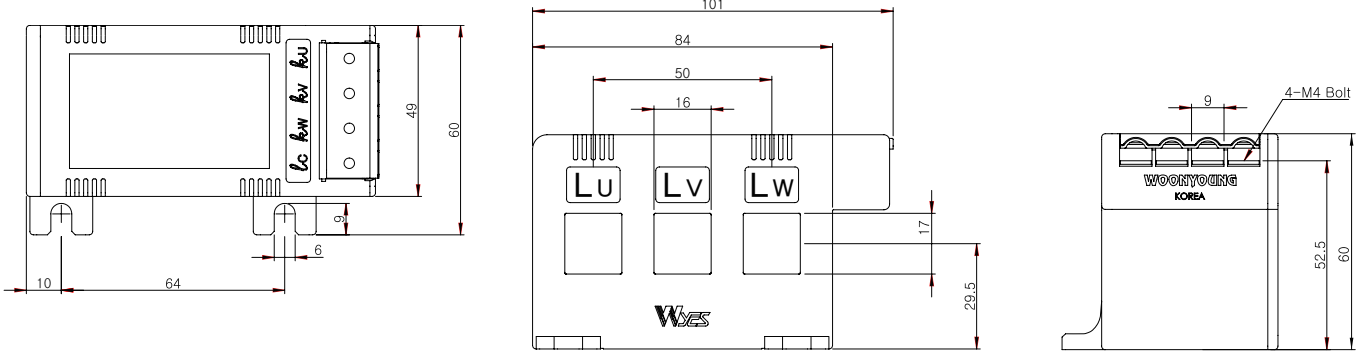


- WY3CS-052, WY3CS-053

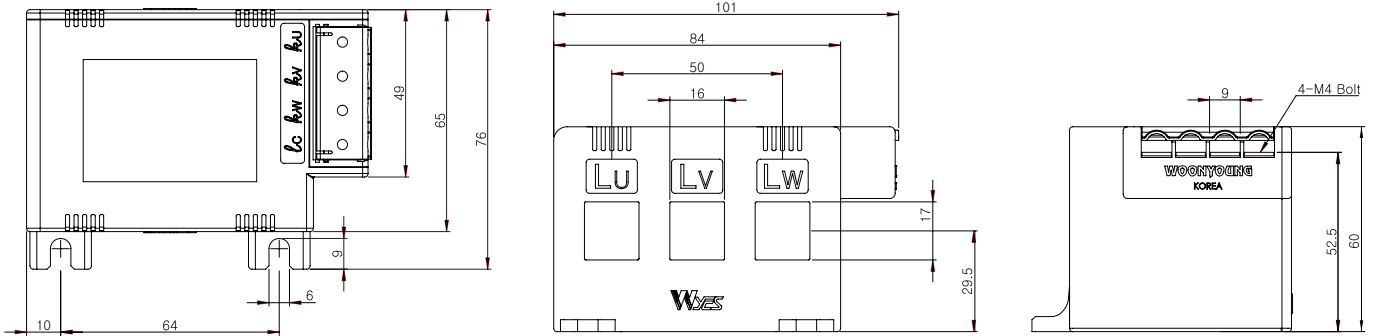

- WY3CS-122, WY3CS-123

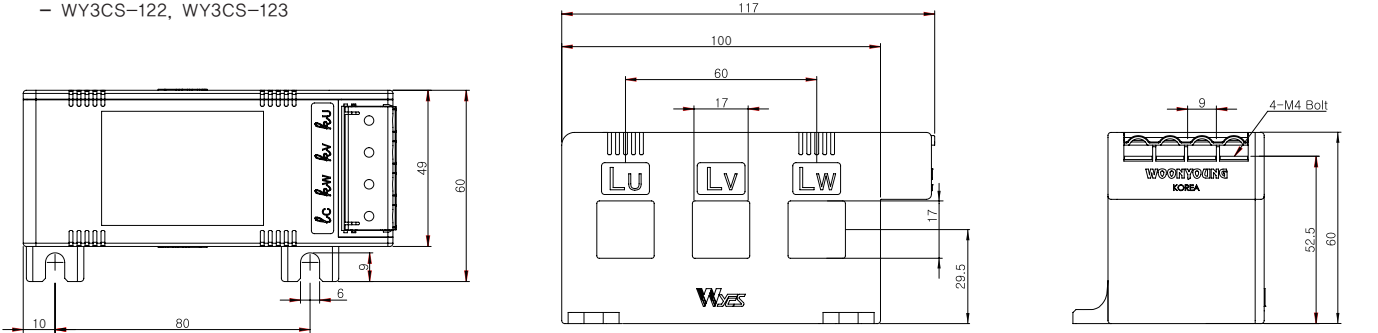

- WY3CS-252, WY3CS-253

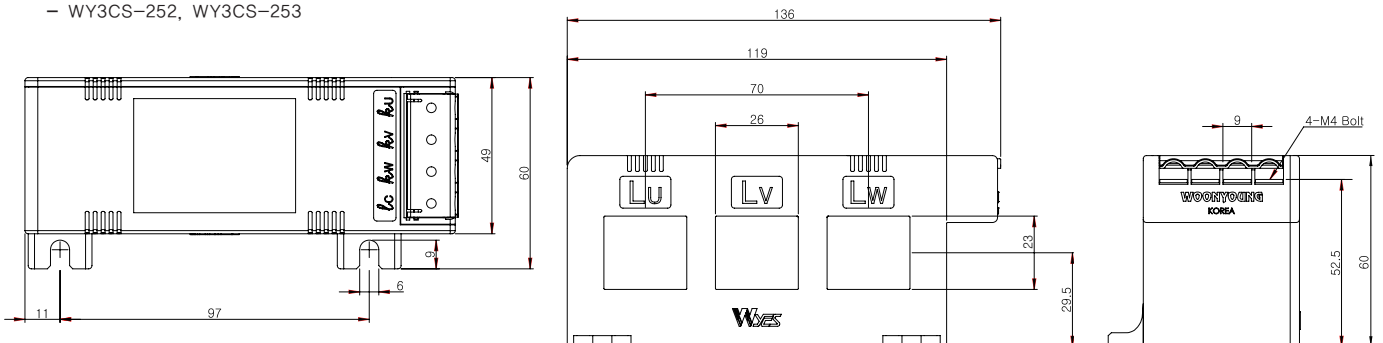

트랜스포머
REACTOR 리액터
무전선변압기
SSR
전력조정기
TPR
스위칭파워
SMPs
노이즈필터
N/F
하모닉필터
H/F
서지보호기
SPD
보호계전기
RELAY
ELED=GFRR
누전경보기
영상변류기
ZCT
METER
판넬메타
계기용변성기
CT=VVT
SHUNT=FA
선트팬