



단상 복권형으로 입력은 AC440V~500V이며 출력은 AC110, 220V로 60VA~5KVA 규격화하였으며 CE를 획득 하였습니다 소비자의 안전성을 고려하여 AC 입력전압 인가시 전원표시 LED가 켜집니다.

Input voltage of single phase is AC 440V and 500V and output is AC 110V and 220V. Product is specialized and standardized from small sized to large capacity (60VA~5KVA) CE to meet the customer needs with power lamp type.

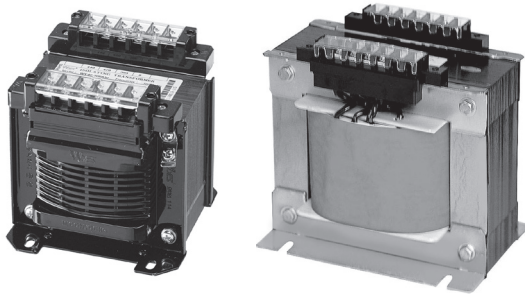

• Circuit Diagram






● Specifications

MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)											WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	a	b	c	d	e	(a,c)Ø1	Ø2	M	
• 440V, 460V, 480V, 500V LINE → 110, 220V LINE																
WY52-60AW	WT	0-440-460-480-500	0-110-220-(E)	60	79	89	88	42	57	53.5	68	7	Ø3.6	5 X12	M3.5	1.65
WY52-80AW				80	89	98	105	46	65	62	83	7	Ø3.6	5 X12	M3.5	2.30
WY52-100AW				100	98	106	105	54	73	61	88	7	Ø3.6	6 X12	M3.5	2.59
WY52-150AW				150	98	106	113	54	72	68	94	7	Ø3.6	6 X12	M3.5	3.20
WY52-200AW				200	112	114	110	58	76	65.5	88	10	Ø3.6	5 X10	M4	3.60
WY52-300AW				300	121	122	114	66	84	73	95	10	Ø3.6	5 X10	M4	4.97
WY52-500AW				500	140	140	126	82	98	79.5	105	10	Ø3.6	6 X12	M4	7.10
WY52-750AW				750	160	162	146	96	114	92.5	135	10	Ø3.6	6 X14	M4	10.70
WY52-1KAW				1K	160	162	156	96	114	102	134	16	Ø4.3	7 X14	M6	12.30
WY52-1.5KAW				1.5K	184	188.5	150	110	133.8	95.2	122	16	Ø4.3	7 X14	M6	16.50
WY52-2KAW				2K	184	188.5	170	110	133.8	115.2	137	16	Ø4.3	7 X19	M6	20.10
WY52-3KAW				3K	219	220	170	-	120	-	135	16	-	7 X15	M6	26.70
WY52-5KAW				5K	245	240	192	-	180	-	165	16	-	9 X19	M6	40.20


※ 3KVA 이상 "I" Bolt 부착 (Attach an "I" bolt for 3KVA or larger)
 ※ 정격용량 : 최대전압(TAP)에서의 용량임.
 ※ Rated capacity : Capacity at the maximum voltage(TAP).

● Dimension

• WT Type



● Terminal



60VA~150VA : Max 6, Min 3.5
 200VA~1kVA : Max 9, Min 4
 1.5~5kVA : Max 15, Min 6

트랜스포머
 REACTOR
 무정전압변압기
 전력조정기
 스위칭파워
 노이즈 필터
 하모닉 필터
 서지보호기
 보호계전기
 누전경보기
 영상변류기
 판넬메타
 계기용 변성기
 섀트팬