

노이즈필터

Noise Filter

1Ø 고감쇄형(Multi-Stage Type)

• 1Ø 250V 6 ~ 150A



UL 인증



● Features


- 2 Mounting Option
 - WYF****D : Din Rail Mounting
 - WYF**** : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- KC(HK03001-18007A)
- UL Cer. No : E521164

● Specifications


ITEM	MODEL	SYMBOL	WYFS06T1M (D)	WYFS10T1M (D)	WYFS15T1M (D)	WYFS20T1M (D)	WYFS30T1M (D)
Rated Voltage	V		250				
Rated Current	A		6	10	15	20	30
Frequency	Hz		50 / 60				
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)				
Insulation Resistance	MΩ		500MΩ at the 500VDC				
Leakage Current	mA		≤2.6mA at 250VAC				
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]				
Operating Humidity	RH		35 ~ 85%RH				
Weight	kg		0.2				

※ Derating Curve of page 519


● Circuit Diagram

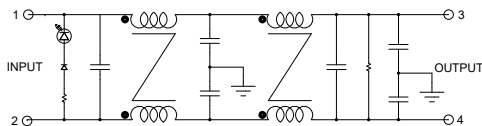


● Terminal





● Characteristics

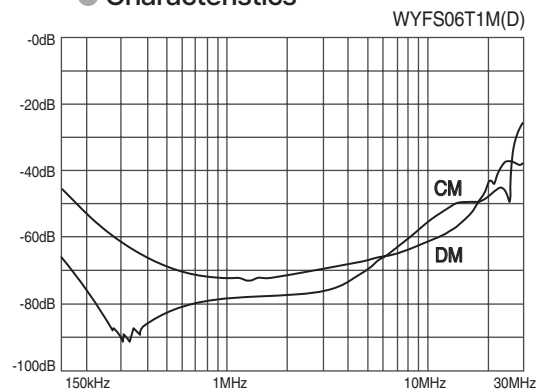

● Dimension

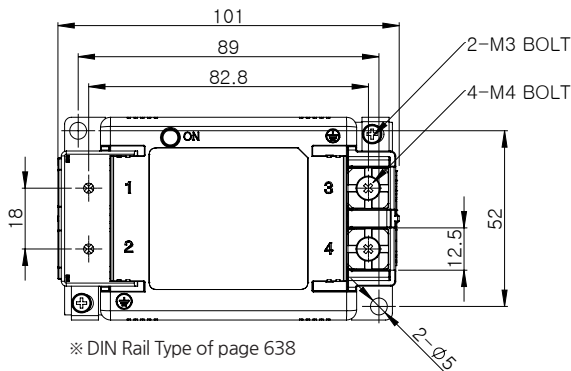

※ DIN Rail Type of page 638

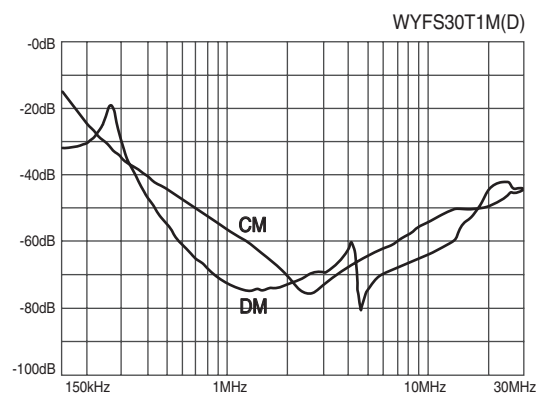

NOISE FILTER

WYES®
노이즈 필터

N Series 1Ø 250V 고감쇄형 Multi-Stage Type

UL US K C E RoHS

UL 인증



● Features


- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- RoHS Compliant
- UL Cer. No : E521164

● Specifications


ITEM	MODEL	SYMBOL	WYNFS06T2M	WYNFS10T2M	WYNFS15T2M	WYNFS20T2M	WYNFS30T2M	WYNFS40T2M	WYNFS50T2M
Rated Voltage	V		250						
Rated Current	A		6A	10A	15A	20A	30A	40A	50A
Frequency	Hz		50 / 60						
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)						
Insulation Resistance	MΩ		500MΩ at the 500VDC						
Leakage Current	mA		≤ 3.2mA at the 250VAC						
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]						
Operating Humidity	RH		35 ~ 85%RH						
Weight	kg		2.4						

※ Derating Curve of page 519


● Circuit Diagram

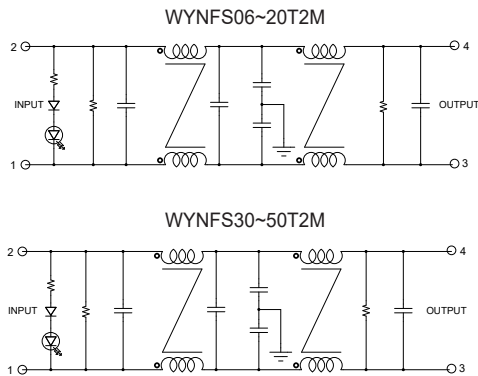


● Terminal



● Characteristics

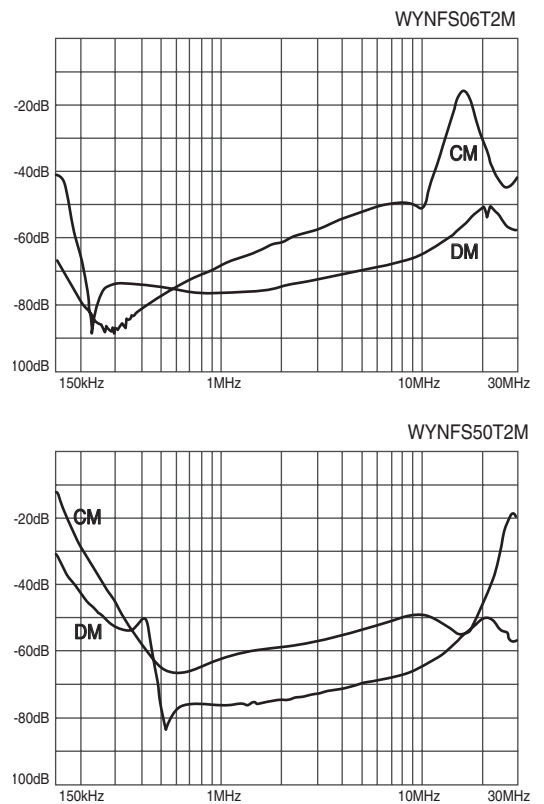

● Dimension

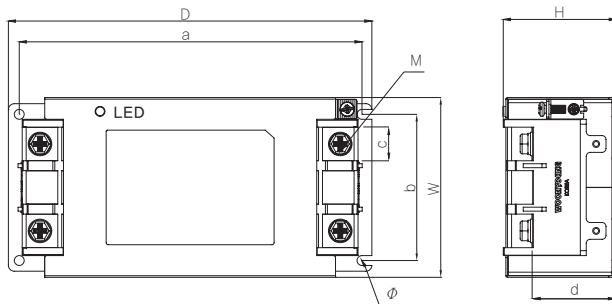

MODEL	W	H	D	a	b	c	d	M	Ø
WYNFS06~20T2M	70.5	45	202	194	51.5	10.5	33	4	5
WYNFS30~50T2M	79.2	48.3	242	232	60	13	33.5	5	5

T
R
A
N
S
=
N
C
T
리
액
터
무
전
압
블
레이
SSR
전
력
조
정
기
TPR
스
위
장
파
워
SMP
스
위
장
파
워
N
F
노
이즈
필
터
하
모
너
필
터
H
F
서
지
보
호
기
SPD
보
호
계
전
기
RELAY
E
L
D
=
G
F
R
누
전
경
보
기
영
상
변
류
기
ZCT
M
E
T
E
R
판
넬
메
타
계
기
용
변
성
기
CT=VT
S
H
U
N
T
=
F
A
N
선
트
팬

UL 인증



● Features


- Wide Band : High Attenuation
- Band Width : 150kHz ~ 30MHz
- RoHS Compliant
- UL Cer. No : E521164

● Specifications


ITEM	MODEL	SYMBOL	WYNFS60T2M	WYNFS80T2M	WYNFS100T2M	WYNFS120T2M	WYNFS150T2M
Rated Voltage	V		250				
Rated Current	A		60A	80A	100A	120A	150A
Frequency	Hz		50 / 60				
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)				
Insulation Resistance	MΩ		500MΩ at the 500VDC				
Leakage Current	mA		≤10.6mA at the 250VAC				
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE - 1]				
Operating Humidity	RH		35 ~ 85%RH				
Weight	kg		4.5		5.2		

※ Derating Curve of page 519

● Circuit Diagram

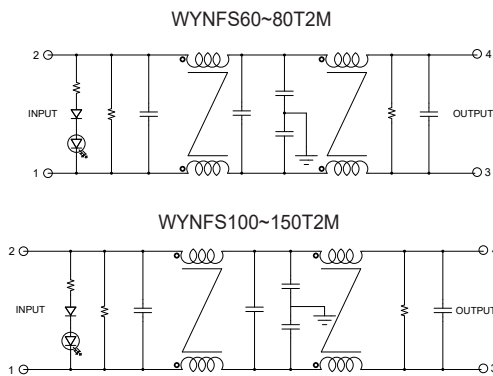


● Terminal




Max 16, Min 6 (60~80A)
Max 23, Min 8 (100~150A)


● Characteristics

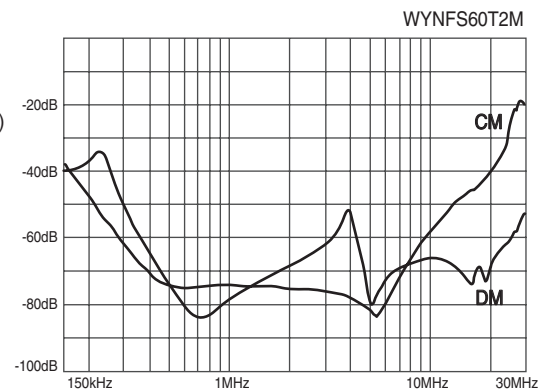

● Dimension

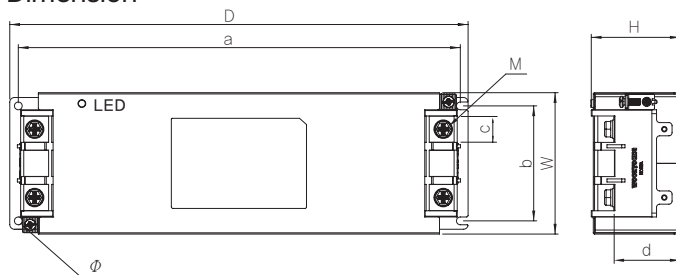

MODEL	W	H	D	a	b	c	d	M	Ø
WYNFS60~80T2M	91	57.2	295	284.5	74	17	42.3	6	5
WYNFS100~150T2M	115	75	384.7	368	96	24	58	8	5

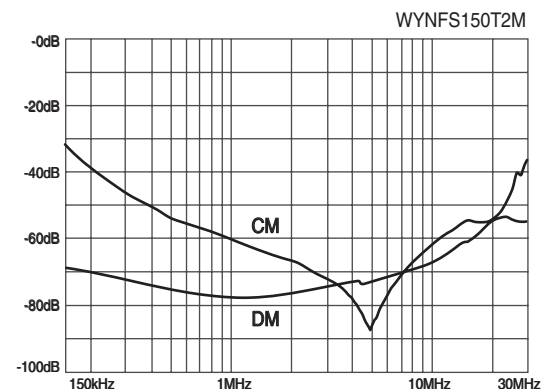



● Features


- High Attenuation
- High Voltage Pulse Noise
- 2 Stage Filter
- Band Width : 150KHz ~ 30MHz
- RoHS Compliant

● Specifications


ITEM	MODEL	SYMBOL	WYFS06T2M	WYFS10T2M	WYFS15T2M	WYFS20T2M	WYFS30T2M	WYFS40T2M	WYFS50T2M
Rated Voltage	V		250						
Rated Current	A		6	10	15	20	30	40	50
Frequency	Hz		50 / 60						
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)						
Insulation Resistance	MΩ		500MΩ at the 500VDC						
Leakage Current	mA		≤1.5mA at the 250VAC						
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]						
Operating Humidity	RH		35 ~ 85%RH						
Weight	kg		0.8			1.7			

※ Derating Curve of page 519

● Circuit Diagram

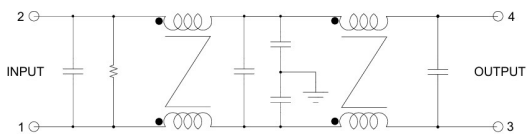


● Terminal




Max 10, Min 4 (6~20A)
Max 14, Min 4 (30~50A)


● Characteristics

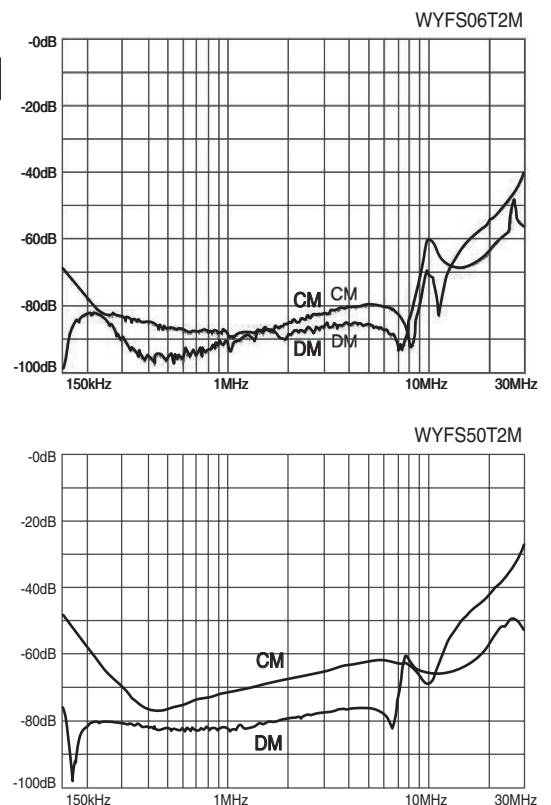

● Dimension

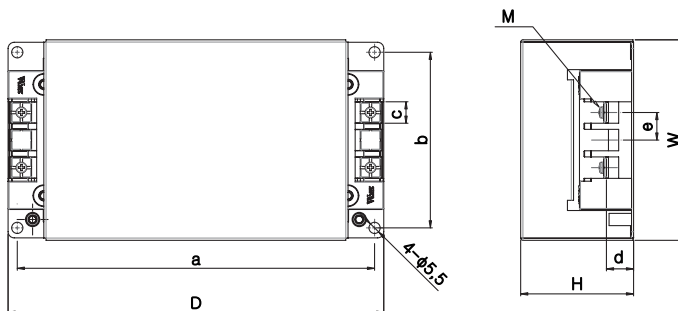

MODEL	W	H	D	a	b	c	d	e
WYFS06~20T2M	98	55	184	175	86	10.5	13	13.5
WYFS30~50T2M	116	75	234	219	98	15	18	27.5

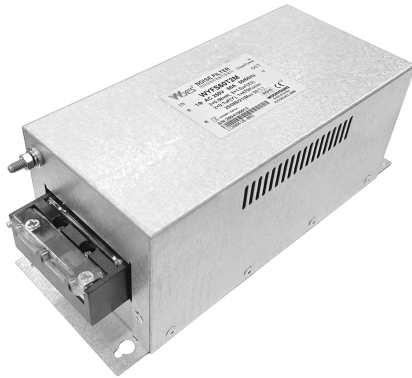

● Features


- High Attenuation
- High Voltage Pulse Noise
- 2 Stage Filter
- Band Width : 150KHz ~ 30MHz
- RoHS Compliant

● Specifications


ITEM	MODEL	SYMBOL	WYFS60T2M	WYFS80T2M	WYFS100T2M
Rated Voltage	V		250		
Rated Current	A		60	80	100
Frequency	Hz		50 / 60		
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)		
Insulation Resistance	MΩ		500MΩ at the 500VDC		
Leakage Current	mA		≤22.6mA at the 250VAC		
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]		
Operating Humidity	RH		35 ~ 85%RH		
Weight	kg		2.8		

※ Derating Curve of page 519


● Circuit Diagram

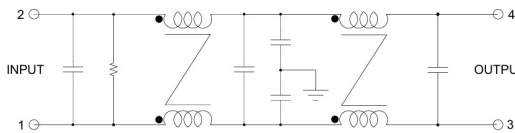



● Terminal











● Dimension

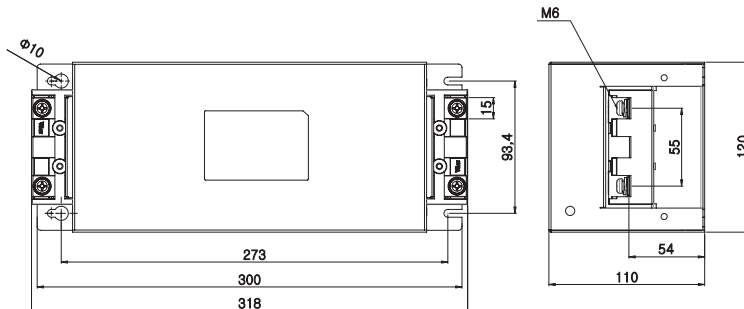

● Characteristics






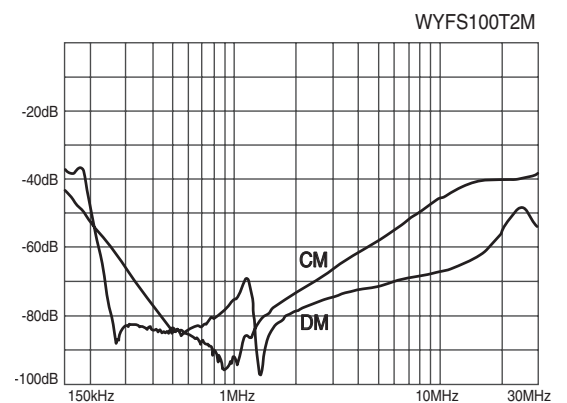
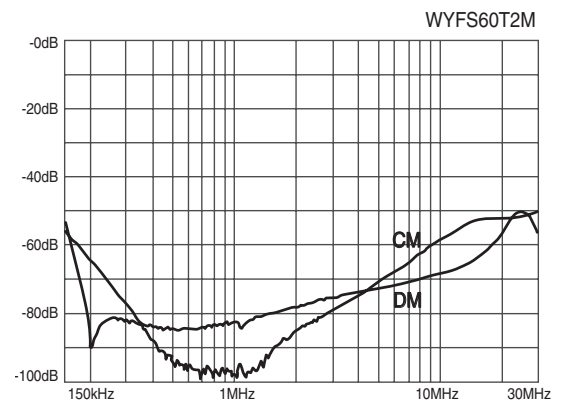


● Characteristics

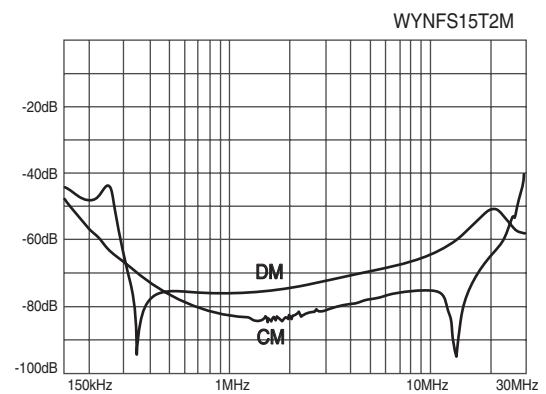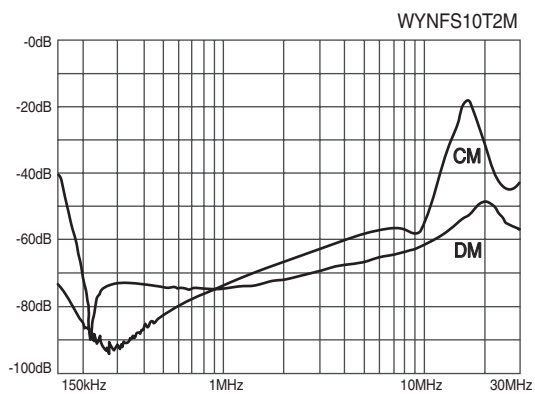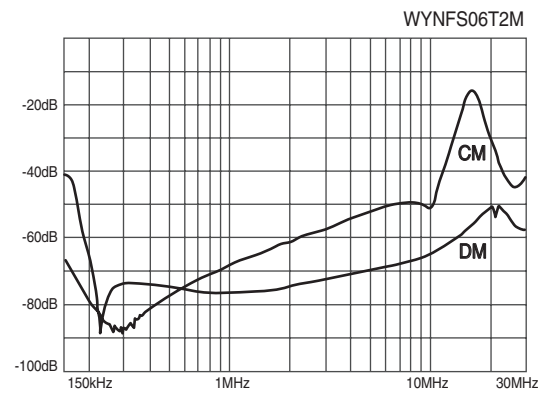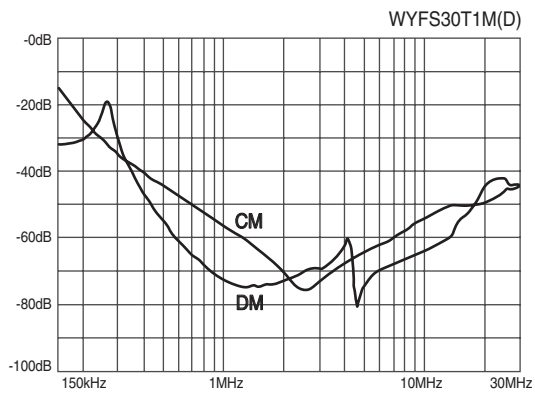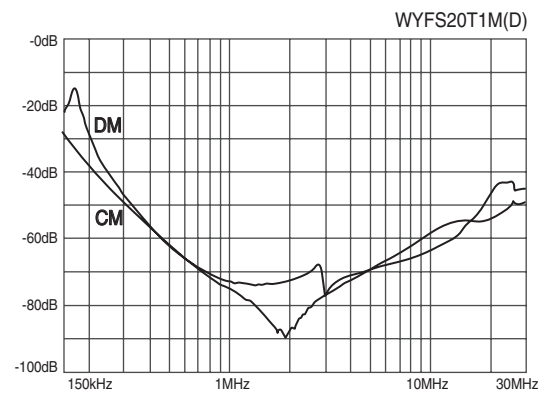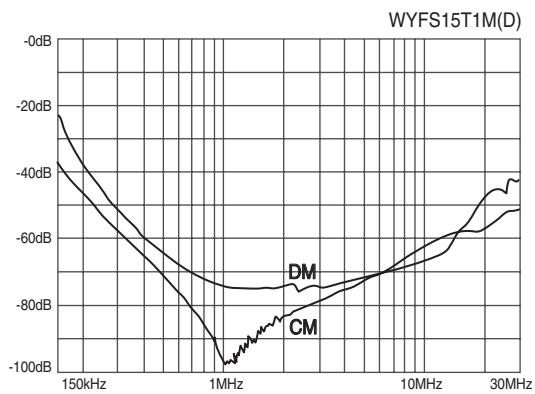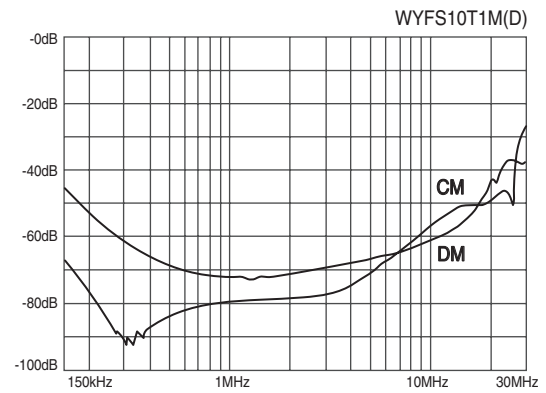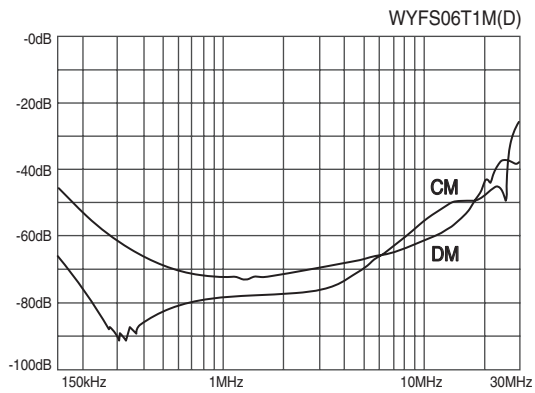









※ CM : Common mode, DM : Differential mode

● Characteristics

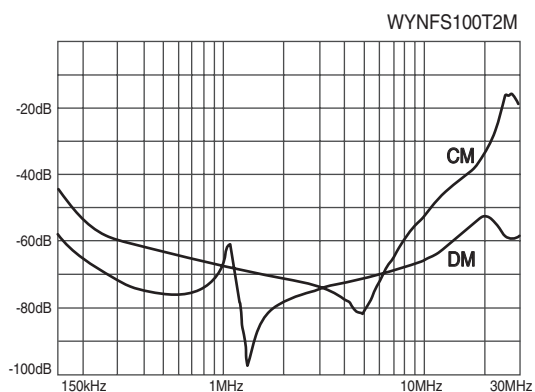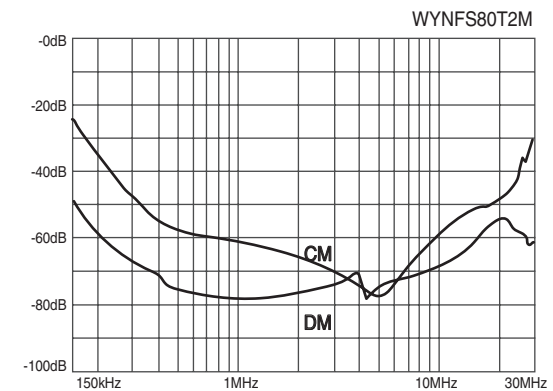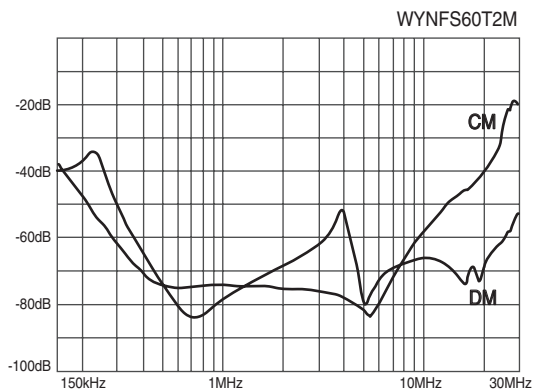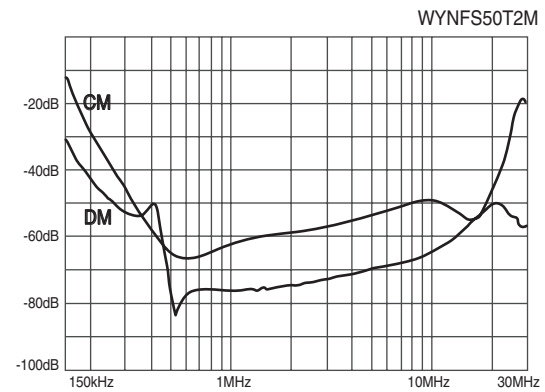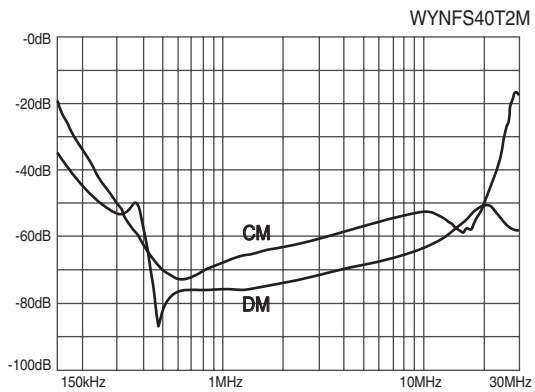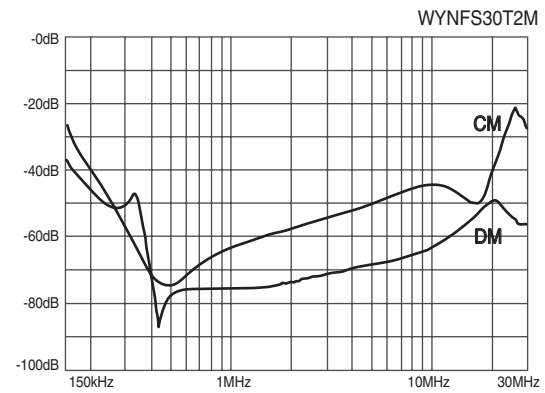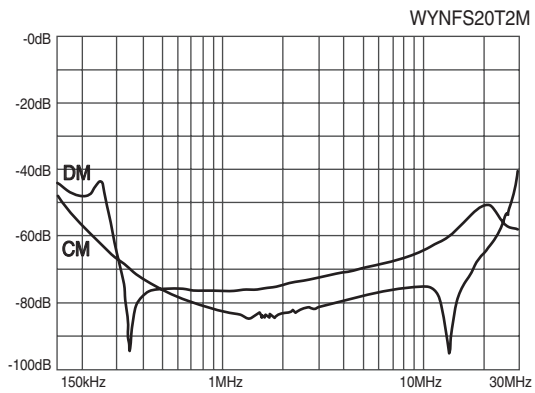

※ CM : Common mode, DM : Differential mode

● Characteristics

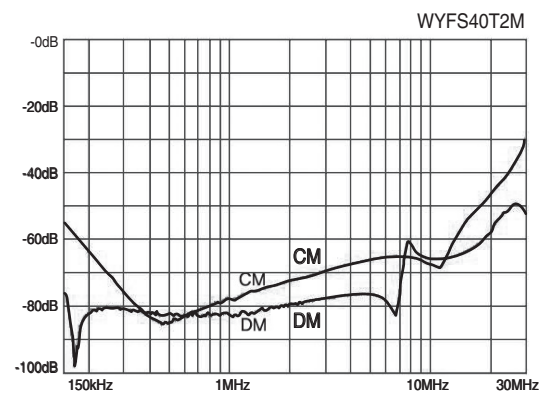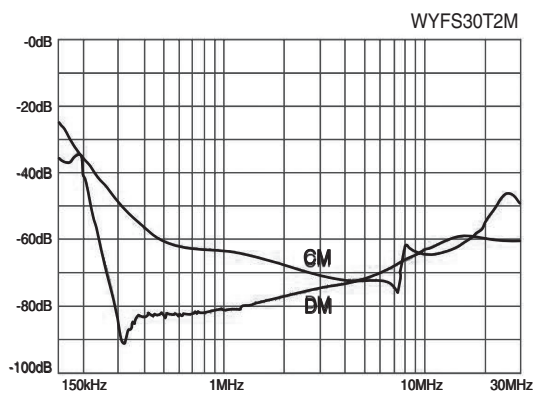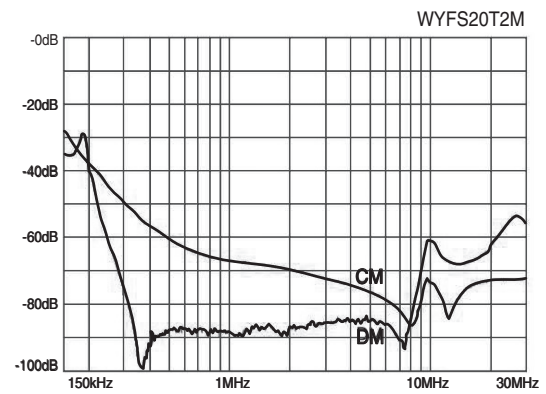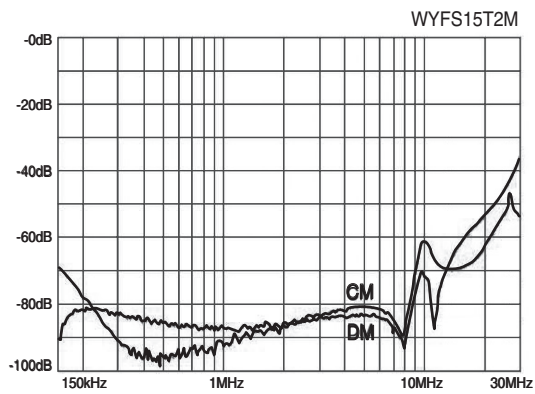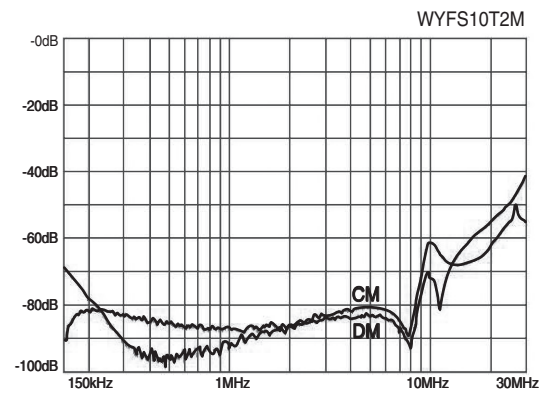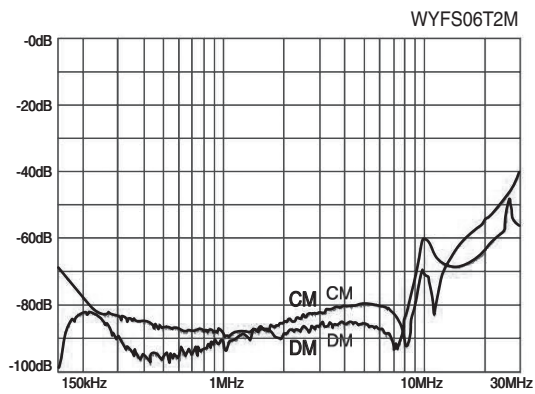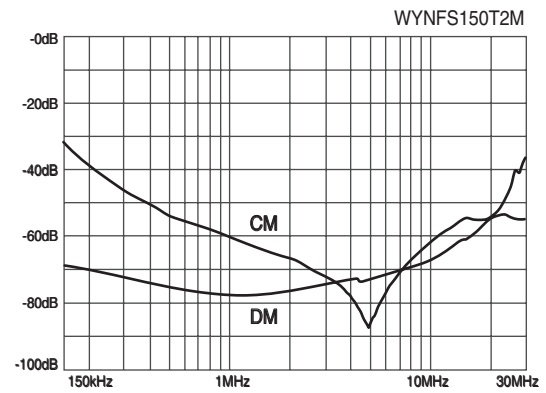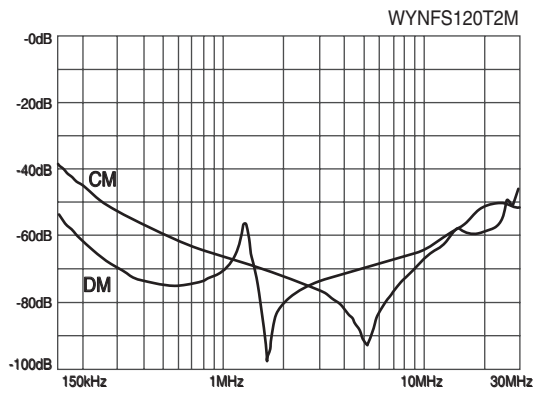

※ CM : Common mode, DM : Differential mode

● Characteristics

