




● Features

- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant


● Specifications

ITEM \ MODEL	SYMBOL	WYFS60T2A	WYFS80T2A	WYFS100T2A	WYFS120T2A	WYFS150T2A	WYFS200T2A
Rated Voltage	V	250					
Rated Current	A	60	80	100	120	150	200
Frequency	Hz	50 / 60					
Dielectric Withstand	V	1500VAC or 2250VDC for 1 minute(Line-Case)					
Insulation Resistance	MΩ	500MΩ at the 500VDC					
Leakage Current	mA	≤1.5mA at 250VAC					
Operating Temperature	°C	-25°C ~ +100°C [Refer to Derating Curve TYPE-1]					
Operating Humidity	RH	35 ~ 85%RH					
Weight	kg	1.5			2.5		

● Circuit Diagram

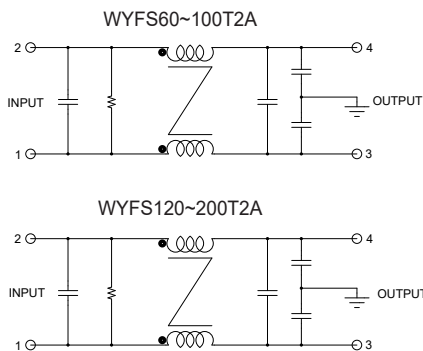



● Terminal




Max 14 , Min 6(60~100A)
Max 14 , Min 6(120~200A)

※ Derating Curve of page 519

● Characteristics

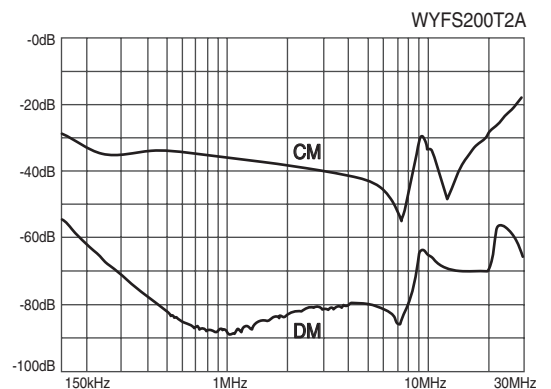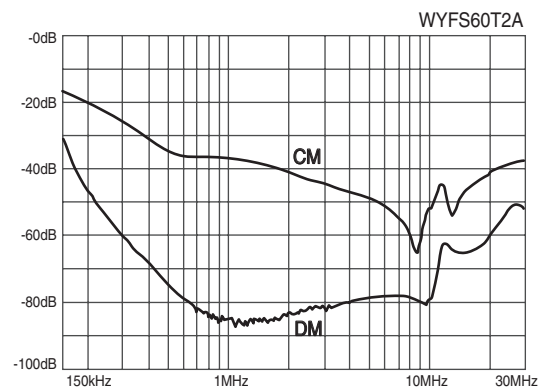

● Dimension

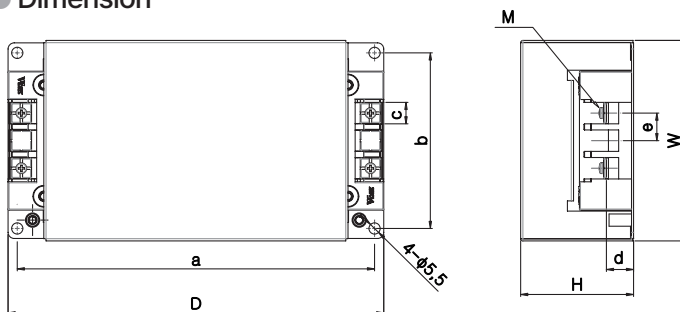

MODEL	W	H	D	a	b	c	d	M
WYFS60 ~ 100T2A	109	60	200	187	93.4	14.5	17.4	6
WYFS120 ~ 200T2A	115.6	75	234	219	98	14.5	17.8	6