

# NOISE FILTER

N Series 3Ø 250V 보급형 General Type



### ● Features


- Wide Band : High Attenuation
- Band Width : 150KHz~30MHz
- RoHS Compliant
- Inverter Output Type : Model Type"C"  
(WYNFT40T2C)

### ● Specifications


ITEM	MODEL	SYMBOL	WYNFT40T2A WYNFT40T2C	WYNFT50T2A WYNFT50T2C	WYNFT60T2A WYNFT60T2C	WYNFT80T2A WYNFT80T2C	WYNFT100T2A WYNFT100T2C	WYNFT120T2A WYNFT120T2C	WYNFT150T2A WYNFT150T2C	WYNFT200T2A WYNFT200T2C	WYNFT250T2A WYNFT250T2C
Rated Voltage	V		250Vac								
Rated Current	A		40A	50A	60A	80A	100A	120A	150A	200A	250A
Frequency	Hz		50/60								
Dielectric Withstand	V		2000Vac for 1 minute or 1075Vdc for 1 minute								
Insulation Resistance	MΩ		DC 100MΩ at the 500Vdc								
Leakage Current	mA		≤2.5mA at the 250Vac						≤16mA at the 250Vac		
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]								
Operating Humidity	RH		35~85%RH								
Weight	kg		1.2			2.2			5.0		

※ "C" : Inverter Output Type / Derating Curve of page 103

### ● Circuit Diagram


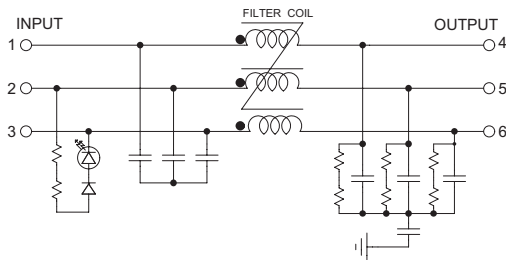


### ● Terminal




Max 16, Min 6 (40~50A)  
Max 23, Min 8 (60~100A)  
Max 28, Min 8 (120~250A)

### ● Characteristics

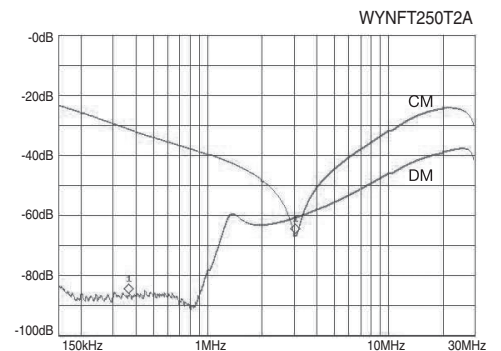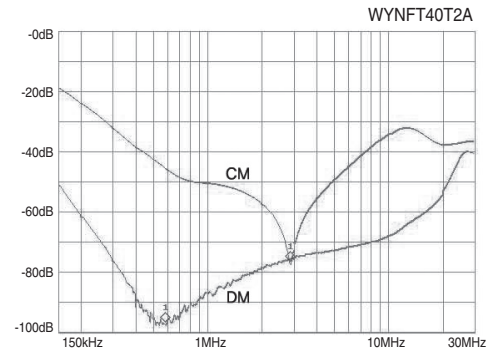









### ● Dimension

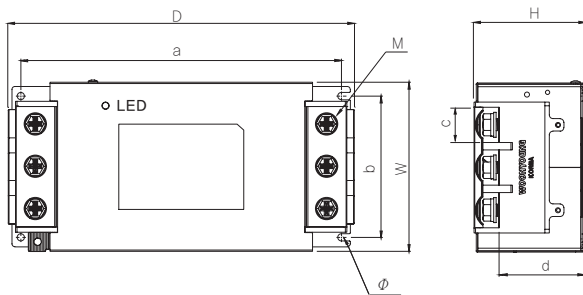

MODEL	W	H	D	a	b	c	d	M	Ø
WYNFT40~50T2A	91	57.2	184	173.5	74	17	42.3	6	5
WYNFT60~100T2A	115	75	235.2	218	96	24	58	8	5
WYNFT120~250T2A	157.2	100.1	347.5	316	130	28.5	68.6	8	6.5









TRANS=NCCT 트랜스포머  
 REACTOR 리액터  
 SSR 무정전압블레이  
 TPR 전력조정기  
 SMPSS 스위칭파워  
 N/F 노이즈필터  
 H/F 하모닉필터  
 SPD 서지보호기  
 RELAY 보호계전기  
 ELD=GFRR 누전경보기  
 ZCT 영상변류기  
 METER 판넬메타  
 CT=VT 계기용변성기  
 SHUNT=FAAN 션트팬

● Characteristics

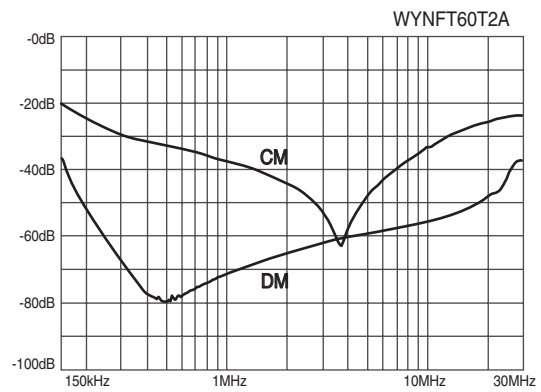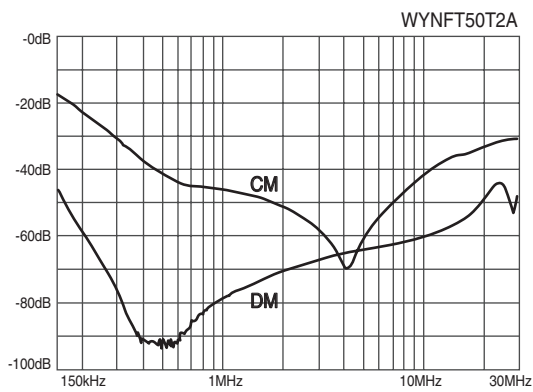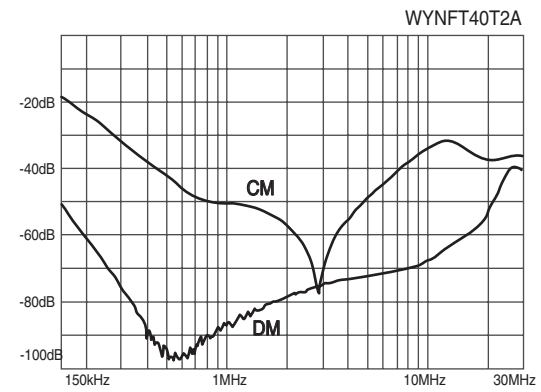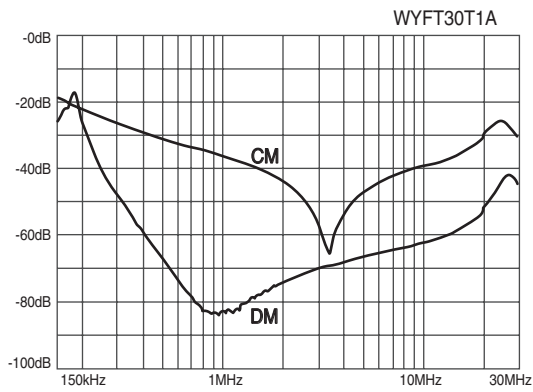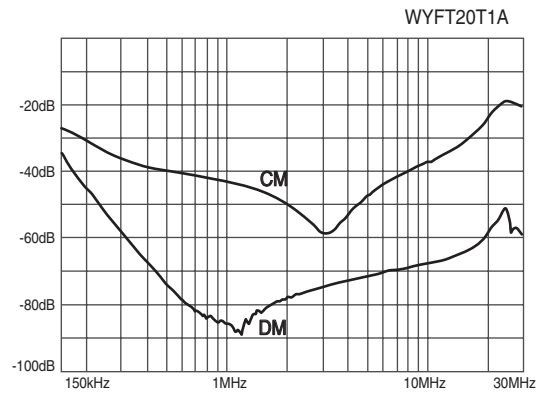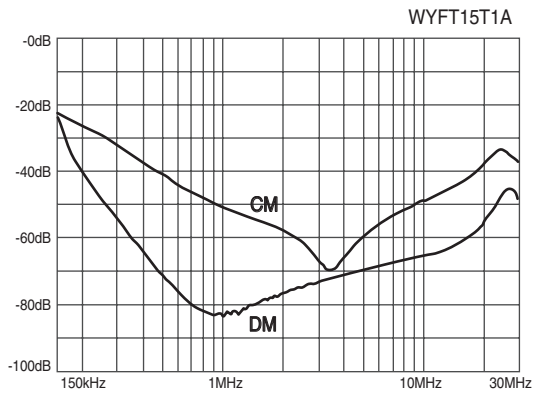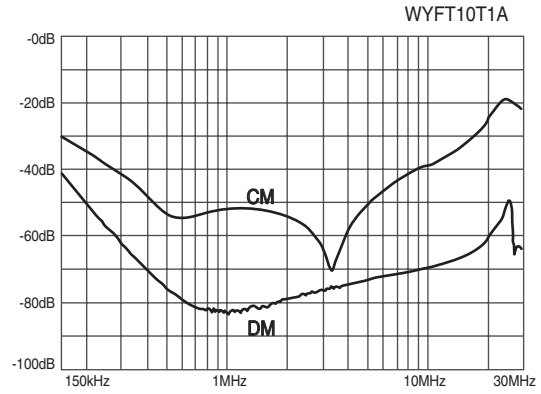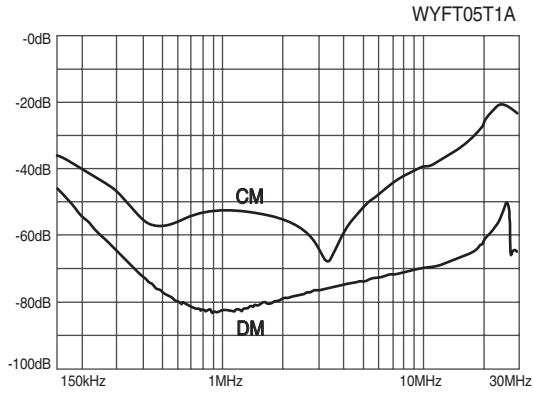

※ CM : Common mode, DM : Differential mode

● Characteristics

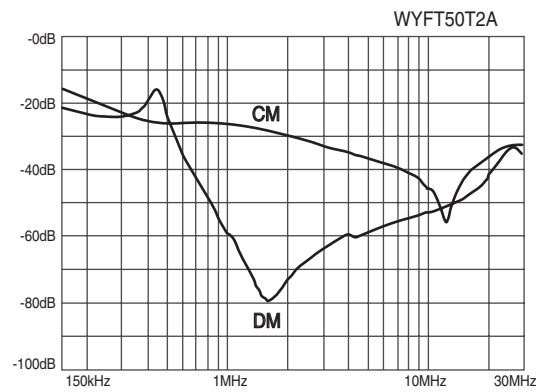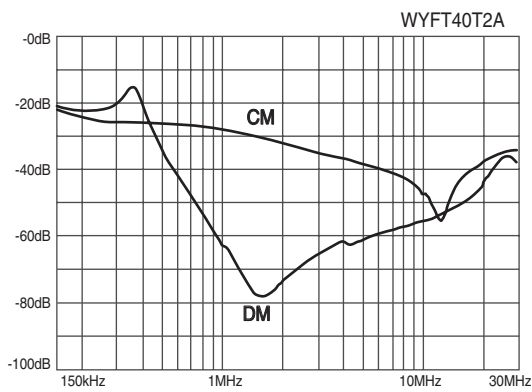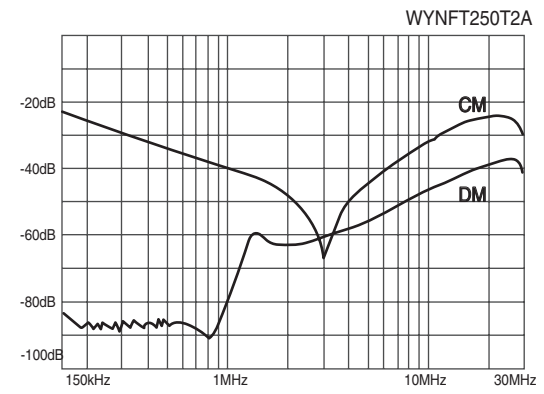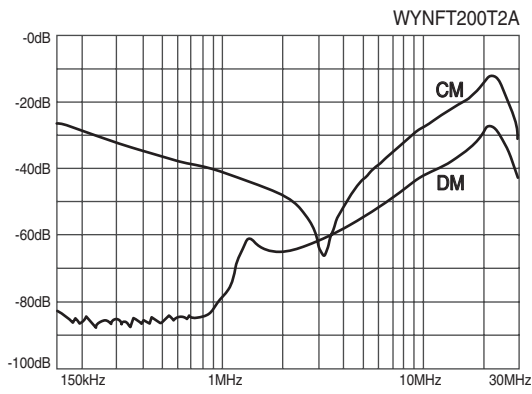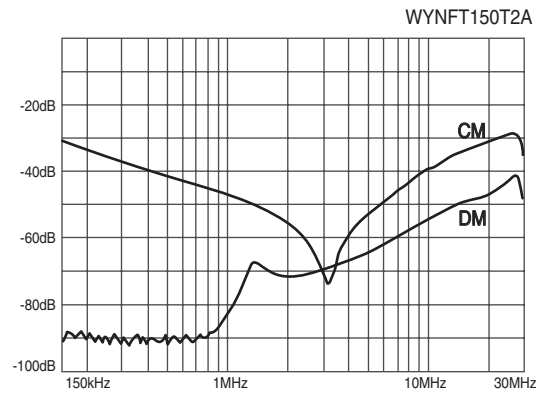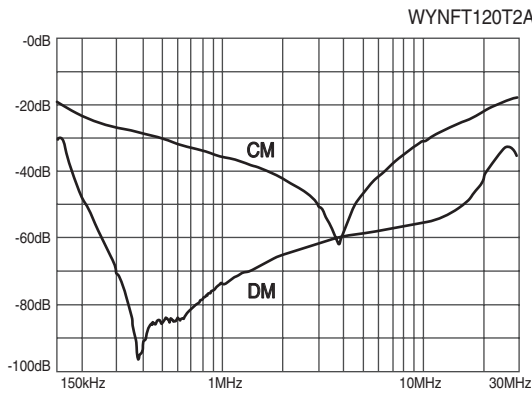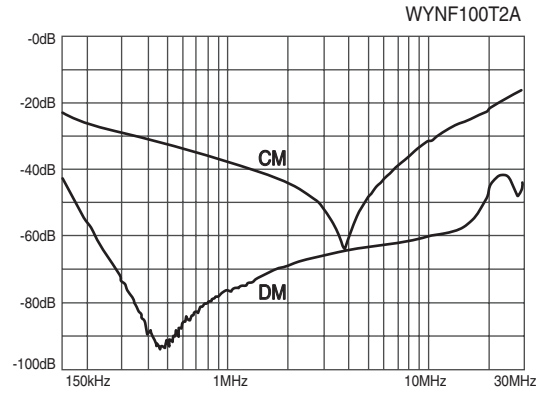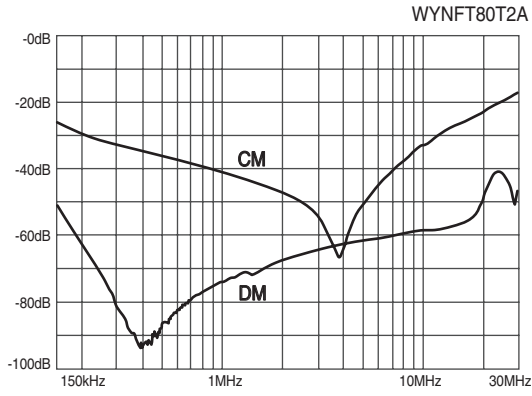

※ CM : Common mode, DM : Differential mode

트랜스포머  
REACTOR  
리액터  
무정전압용  
SSR  
전력조정기  
TPR  
스위칭파워  
SMP  
S  
노이즈 필터  
N/F  
하모닉 필터  
H/F  
서지보호기  
SPD  
보통계전기  
RELAY  
누전경보기  
ELD=GF  
R  
영상변류기  
ZCT  
판넬메타  
METER  
계기용변성기  
CT=VT  
SHUNT=FA  
N