


**DC**  
NOISE  
FILTER

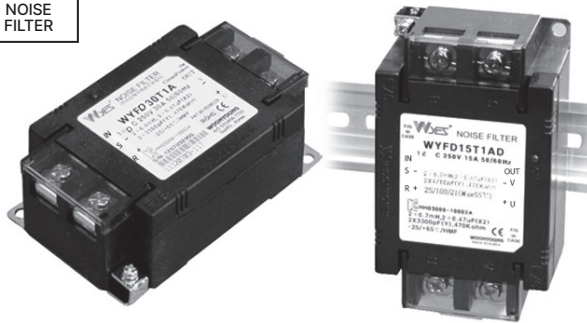


## ● Features

- 2 Mounting Option
  - WYF\*\*\*\*D : Din Rail Mounting
  - WYF\*\*\*\* : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant


## ● Specifications

| ITEM                  | MODEL | SYMBOL | WYF06T1A(D)                                     | WYF10T1A(D) | WYF15T1A(D) | WYF20T1A(D) | WYF30T1A(D) |
|-----------------------|-------|--------|-------------------------------------------------|-------------|-------------|-------------|-------------|
| Rated Voltage         | V     |        | 150VDC ~ 400VDC                                 |             |             |             |             |
| Rated Current         | A     |        | 6                                               | 10          | 15          | 20          | 30          |
| Dielectric Withstand  | V     |        | 2500VAC or 2800VDC for 1 minute(Line-Case)      |             |             |             |             |
| Insulation Resistance | MΩ    |        | DC 100MΩ at the 500Vdc                          |             |             |             |             |
| Leakage Current       | mA    |        | ≤0.8mA at the 250Vac                            |             |             |             |             |
| Operating Temperature | °C    |        | -25°C ~ +100°C [Refer to Derating Curve TYPE-1] |             |             |             |             |
| Operating Humidity    | RH    |        | 35 ~ 85%RH                                      |             |             |             |             |
| Weight                | kg    |        | 0.3                                             |             |             |             |             |


## ● Circuit Diagram

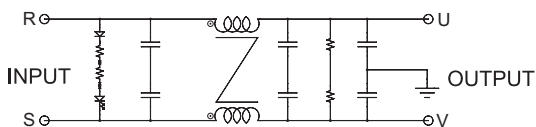

## ● Terminal



## ● Characteristics

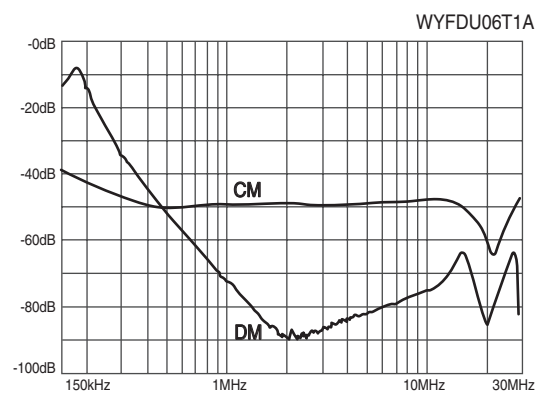

## ● Dimension

