

트랜스포머
REACTOR
리액터
무정전압블레이
SSR
전력조정기
TPR
스위칭파워
SMPs
노이즈필터
N/F
하모닉필터
H/F
서지보호기
SPD
보호계전기
RELAY
누전경보기
ELD=GF
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
선트팬
SHUNT=FAN

WYC Series (삼상단권)


RoHS



삼상, 단권형으로 일반 Dry Type으로 Casing화 하여 전면에는 Lamp V-M, A-M, NFB 등을 부착하였으며 작업자의 작업성을 고려하여 뒷면은 Door 식으로 하여 단자대 (Terminal Block)를 부착하여 작업의 편리성을 증대 하였으며 운반이 용이하도록 Panel에는 운반용 바퀴로 제작 하였습니다.

It is three phase, auto transformer type and combined Casing is made by general dry type.Lamp V-M, A-M and NFB are affixed at the front. For convenience of the operator, door is made at the back and terminal block is attached to increase the convenience of operation. Caster for ransportation is available for easy move.

•Circuit Diagram



Specifications



•2KVA~ 10KVA Insulation Class B
•15KVA~200KVA Insulation Class H

MODEL NO.	SPECIFICATIONS		KVA	DIMENSIONS (mm)			PHASE	RATING VOLTAGE		WEIGHT (kg)
	PRI.(V)	SEC.(V)		W	H	D		PRI.(V)	SEC.(V)	
• 3P 단권형 380V / 440V → 220V LINE										
WY3PC-2KAU	220-380-440 Y-n		2	240	320	375	3Ø단권식 (SINGLE WINDING)	380/440	220	30.0
WY3PC-3KAU			3	300	350	300				33.0
WY3PC-5KAU			5	350	450	350				36.0
WY3PC-7.5KAU			7.5	380	550	430				43.0
WY3PC-10KAU			10	380	550	430				64.0
WY3PC-15KAU	220-380-440 Y-n		15	380	550	430	3Ø단권식 (SINGLE WINDING)	380/440	220	73.0
WY3PC-20KAU			20	430	550	450				87.0
WY3PC-30KAU			30	450	600	450				95.0
WY3PC-40KAU			40	500	650	530				110.0
WY3PC-50KAU			50	550	700	530				133.0
WY3PC-75KAU			75	600	800	560				200.0
WY3PC-100KAU			100	600	800	560				230.0
WY3PC-150KAU			150	650	850	600				312.0
WY3PC-200KAU			200	750	850	650				390.0

※ Order Production : More then 150KVA

Dimension

• WYC Type

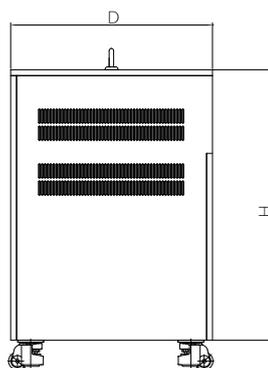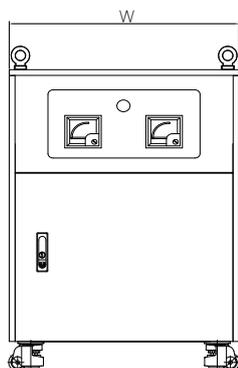

* 부착물: 3Phase 1kVA~3kVA P/L
3Phase 5kVA~100kVA P/L, A, V, NFB

* 주문시 CASE 색상 지정 가능
When ordering, you can select color of case

* 2~20kVA 는 상단부 I Bolt(행거)없음
2~20kVA don't have I Bolt(Hanger)