
저압 직렬리액터 3Ø 220/380/440V(60Hz L=13%) Series Reactor


CE RoHS

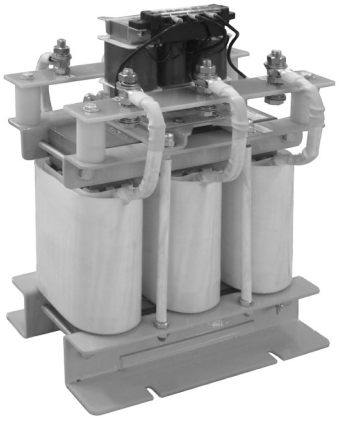

Specifications

- Phase : 3Ø
- Frequency : 60Hz
- Cooling : Natural cooling AN
- Insulation Class : F Class
- Limited Temp. Rinsing : 95k
- Overload Capability :
  25x rated current for 2 Second
- Operating Temp. & Hum :
  −20℃ ~ 40℃ & 0 ~ 80%(Non - Condensing)
- Storage Temp. & Hum :
  −20℃ ~ 50℃ & 0 ~ 80%(Non - Condensing)
- Dielectric Withstand Voltage :
  Between terminal & body (3kVAC for 1min.)
- Insulation Resistance :
  Min. 100MΩ, at 500VDC Megger
- Lifetime(Calculated) : 20Years
- Warranty : 1Year

Connection Diagram

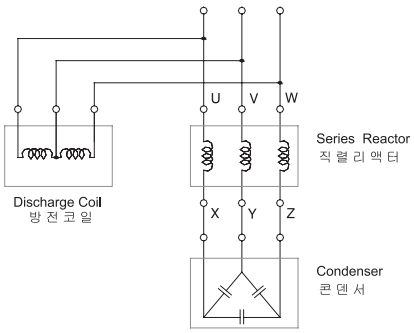

※ 방전 코일은 직렬리액터의 입력측에 연결해서 사용하시기 바랍니다.

60Hz L=13%

MODEL	정격전압 (Rated Voltage)	콘덴서 용량 (Condenser) (Kvar)	리액터 정격 (Reactor) (kVA)	Dimensions(mm)							Weight (kg)
				W	D	H	W1	D1	ø E	M	
WYSR□−0.65B	2=220V 3=380V 4=440V	0.65	5	220	225	365	160	96	10	M6	20.8
WYSR□−1.3B		1.3	10	270	280	430	170	139	10×16.5	M6	32.2
WYSR□−1.95B		1.95	15	270	280	403	170	139	10×16.5	M6	33.3
WYSR□−2.6B		2.6	20	270	280	470	170	139	10×16.5	M6	37.9
WYSR□−3.25B		3.25	25	280	290	485	179	141	9×21	M8	43.7
WYSR□−3.9B		3.9	30	300	320	485	180	139	9×26	M8	45.9
WYSR□−5.2B		5.2	40	300	320	485	180	139	9×26	M8	48.3
WYSR□−6.5B		6.5	50	350	320	550	171	190	9×21.5	M10	70.9
WYSR□−7.8B		7.8	60	350	360	550	171	190	9×21.5	M10	73.8
WYSR□−9.1B		9.1	70	350	360	550	171	200	9×21.5	M10	81.7
WYSR□−9.75B		9.75	75	350	360	550	171	200	9×21.5	M10	81.7
WYSR□−13B		13	100	390	380	570	240	215	9×21.5	M10	107.4
WYSR□−19.5B		19.5	150	470	400	600	250	220	9×21.5	M12	137.4

Model Type : WYSR□ - □□ B

- □ : 2=220V, 3=380V, 4=440V
- □□ : Capacity 0.65~ 19.5

Dimension

