


VOLTAGE TRANSFORMER (VT)


0.72~1.15kV (50~500VA)

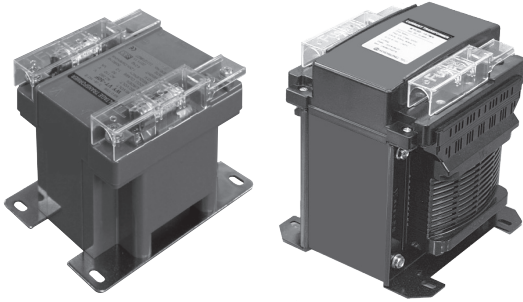

Specifications

- Maximum voltage : 0.72~1.15kV
- Frequency : 60Hz (standard) 50/60Hz
(by specified) classification
- Over voltage factor : 1.2Vn (KS C IEC 61869-3)
- Fuse : AC500V (MAX) 10.3 x 38mm

Connection Diagram





Model	Rated Voltage[V]		IEC 61869-3		KS C 1706		IEEE C 57.13		JEC 1201		Fuze (A)	Weight (kg)
	1st	2nd	Burden [VA]	Class [%]	Burden [VA]	Class [%]	Burden	Class	Burden	Class [%]		
WYVT-50F	110 ~ 600	110 or 220	50	1.0	50	1.0	M	1.2	50	1P	2A	≒3.9
WYVT-100F			100	1.0	100	1.0	Y	1.2	100	1P		≒4.0
WYVT-200F			200	1.0	200	1.0	Z	1.2	200	1P		≒5.0
WYVT-300F			300	1.0	300	1.0	-	-	300	1P		≒7.1
WYVT-500F			500	1.0	500	1.0	ZZ	1.2	500	1P		≒10.0

※ Type "F" : Fuse in type

Illustration & Drawing

Type:A






Dimension

MODEL	A	B	C	D	H	M	Type
WYVT-50F	75	98	125	140	110	M5	A
WYVT-100F	85	108	125	140	110		
WYVT-200F	95	113	125	140	123		
WYVT-300F	98	140	106	126.5	136.5	M4	B
WYVT-500F	114	160	134	156	180	M5	C

unit : (mm)

Type:B



Type:C

