

UL 인증



● Features


- 2 Mounting Option
 - WYF****D : Din Rail Mounting
 - WYF**** : Screw Mounting
- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- UL Cer. No : E521164

● Specifications


ITEM	MODEL	SYMBOL	WYFS40T1B (D)	WYFS50T1B (D)
Rated Voltage	V		250	
Rated Current	A		40	50
Frequency	Hz		50 / 60	
Dielectric Withstand	V		1500VAC or 2250VDC for 1 minute(Line-Case)	
Insulation Resistance	MΩ		500MΩ at the 500VDC	
Leakage Current	mA		≤1.5mA at the 250VAC	
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-1]	
Operating Humidity	RH		35 ~ 85%RH	
Weight	kg		0.5	

※ Derating Curve of page 519


● Circuit Diagram

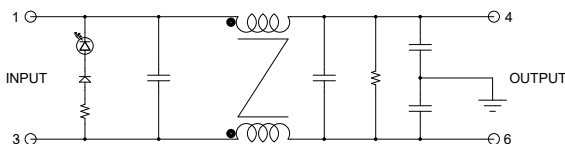


● Terminal




● Characteristics

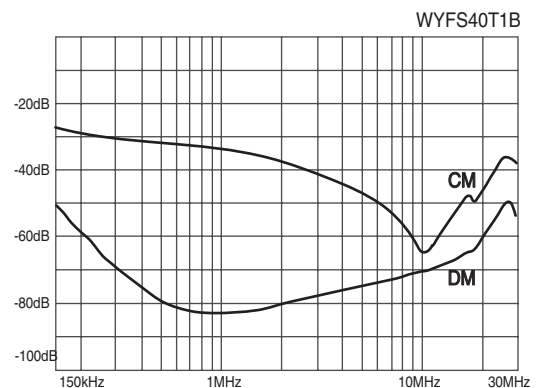

● Dimension







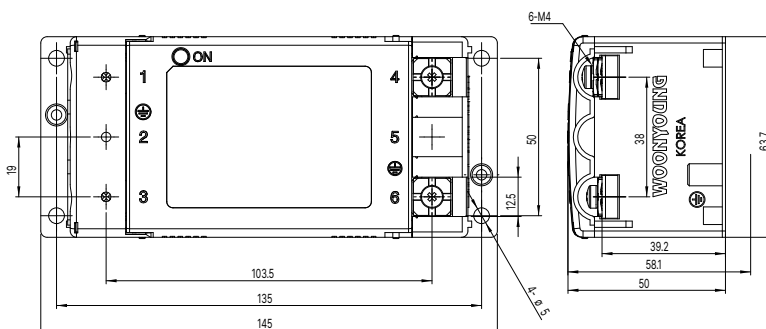


※ DIN Rail Type of page 638

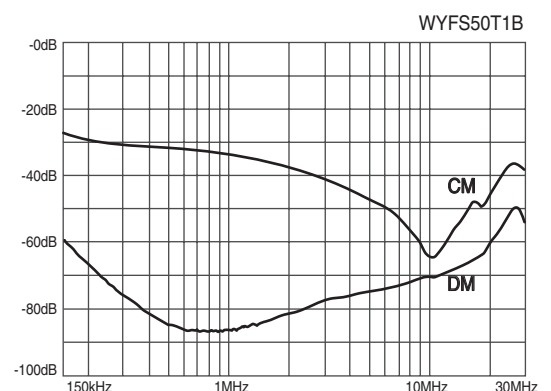

트랜스포머
REACTOR
리액터
무전압블레이
SSR
전력조정기
TPR
스위칭파워
SMP
노이즈필터
H/F
하모닉필터
SPD
서지보호기
보통계전기
RELAY
누전경보기
ELD=GF
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
선풍팬
SHUNT=FAN

● Characteristics

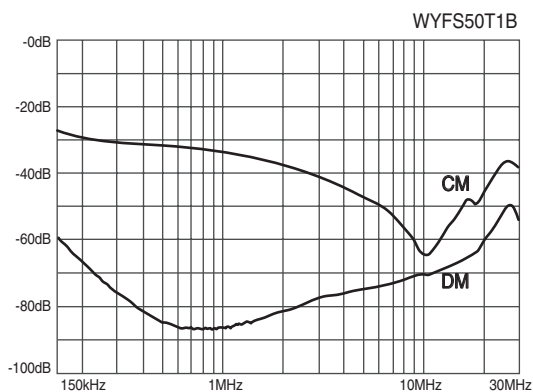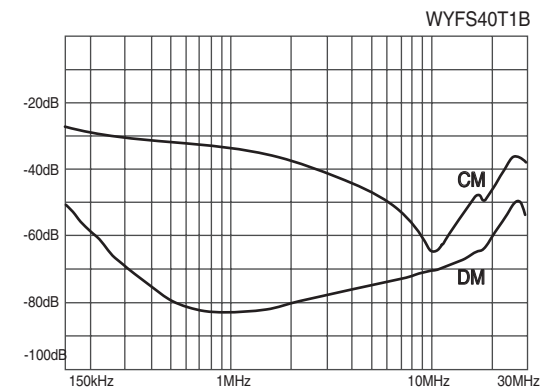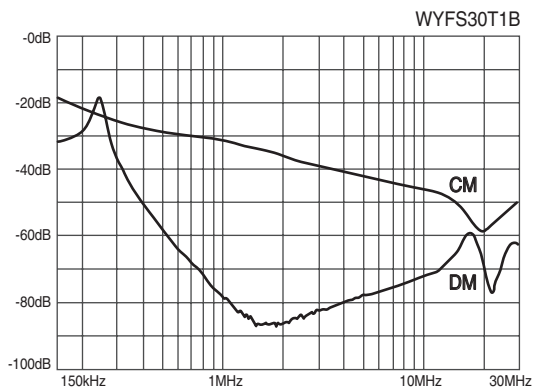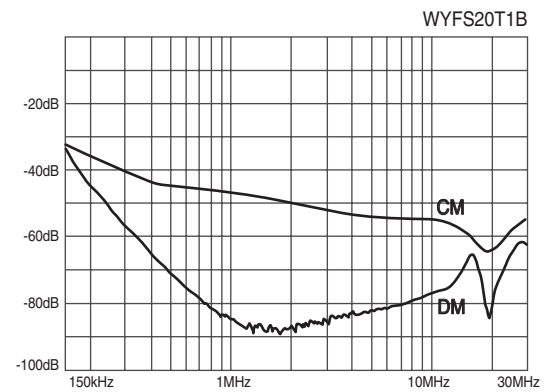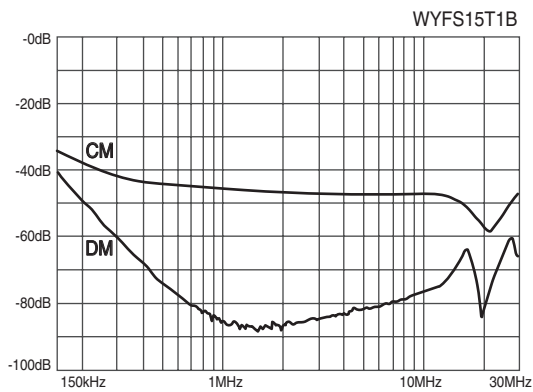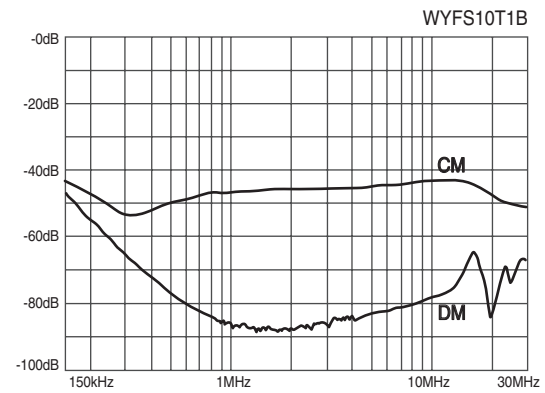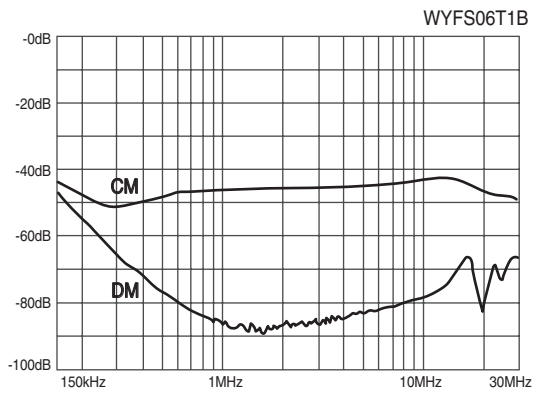

※ CM : Common mode, DM : Differential mode