


단상 단권형으로 입력 AC380/440V 출력 AC 220V로 Lead-Wire로 제작되었으며 권선보호형 덮개형으로 분진, 습기가 많은 곳에서 사용하도록 제작 하였습니다.

It is a single phase auto transformer with AC380V/440V and 220V of output. It has been withdrawn by lead wire manufactured to be used at the place of server dust and humidity and vibration etc. By use of the cover of winding protector.



•Circuit Diagram




● Specifications

Insulation Class B

MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)						SUITABLE WIRE		WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	b	d	Ø2	PRI.	SEC.	
WYAU-75DWE	WE	0-380-440 흑(BLACK) 녹(GREEN) 갈(BROWN)	0-220 흑(BLACK) 적(RED)	75	78	68	81	64	54	4 x 11	0.75mm ²	0.75mm ²	1.30
WYAU-100DWE				100	78	68	86	64	59	4 x 11			1.60
WYAU-150DWE				150	89	75	101	76.5	67.5	5 x 14			1.95
WYAU-200DWE				200	99	85	103	79	70	5 x 14			2.27
WYAU-300DWE				300	99	85	113	79	80	5 x 15			3.20
WYAU-500DWE				500	118	99	115	102	78	5 x 12			4.78
WYAU-1KDWE				1K	137	115	119	116	81	5 x 12			6.89

● Dimension

• WP Type

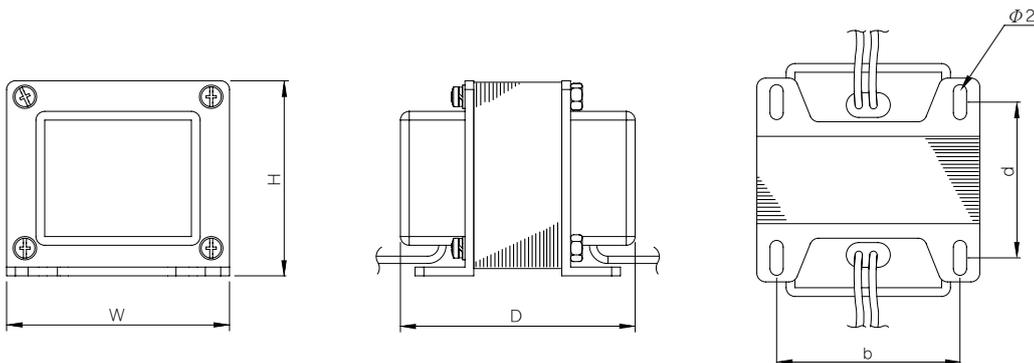

트랜스포머
REACTOR
리액터
무정전압레일
SSR
전력조정기
TPR
스위칭파워
SMPs
노이즈필터
N/F
하모닉필터
H/F
서지보호기
SPD
보호계전기
RELAY
E.L.D.=G.F.R
누전경보기
영상변류기
ZCT
판넬메타
METER
계기용변성기
CT=VT
SHUNT=FA
센트팬