




삼상 복권형으로 일반 Dry Type으로 Casing화 하여 전면에는 Lamp,계측기, NFB 등을 부착하였으며 기존 전압, 전류만 계측하는 것을 넘어 전력, 전력량, 전력품질, 온도 등 다양한 동작상태를 계측, 지원하며 실시간 데이터를 485통신으로 상위통신망에 접속이 가능합니다. 사용간 발생할수 있는 전기적 이슈에 대하여 최대 8가지 항목중 2개 요소를 선택하여 알람을 받아볼 수 있습니다. 뒷면은 Door 식으로 하여 단자대(Terminal Block)를 부착하여 작업의 편리성을 증대 하였으며 운반이 용이하도록 Panel에는 운반용 바퀴로 제작하였습니다

It is a three-phase, double-circuit type, Cased as a general dry type, and uses a lamp, measuring instrument, NFB, etc. on the front to operate states such as power, amount of power, power quality, temperature, etc. that exceed the existing voltage and power consumption, and provides data 485 You can connect to a higher-level communication network through communication. When using it, you can select two of up to eight items to receive an alert regarding electrical problems that occur. The back is a door type, and the panel is made with storage wheels to facilitate the installation of a terminal block at the bottom.

•Circuit Diagram



● Specifications


·5KVA Insulation Class B
·7.5KVA~100KVA Insulation Class H

MODEL NO.	SPECIFICATIONS		KVA	DIMENSIONS (mm)			PHASE	RATING VOLTAGE		WEIGHT (kg)
	PRI.(V)	SEC.(V)		W	H	D		PRI.(V)	SEC.(V)	
· 3P 복권형 380V / 440V → 220V LINE										
WY3PCM-5KW	380-440 Y-n	220 Δ	5	380	550	430	3Φ복권식 (DOUBLE WINDING)	380/440	220	71.0
WY3PCM-7.5KW	380-440 Y-n	220 Δ	7.5	380	550	430	3Φ복권식 (DOUBLE WINDING)	380/440	220	84.0
WY3PCM-10KW			10	430	550	450				98.0
WY3PCM-15KW			15	450	600	450				126.0
WY3PCM-20KW			20	500	650	530				141.0
WY3PCM-30KW			30	550	700	530				183.0
WY3PCM-40KW			40	600	800	560				226.0
WY3PCM-50KW			50	600	800	560				235.0
WY3PCM-75KW			75	650	850	600				360.0
WY3PCM-100KW			100	750	850	650				430.0

※온도검출 Option (PT 100Ω)

● Dimension

• WYCM Type

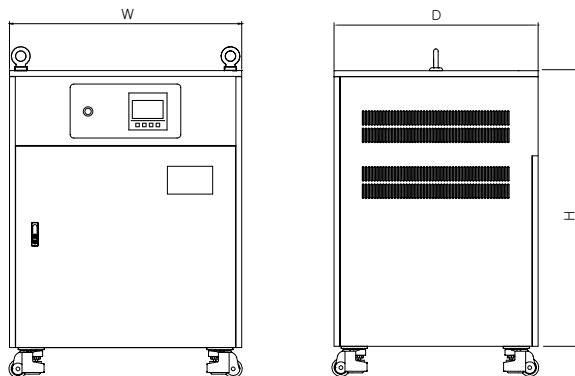

* 부착물: 3Phase 5kVA~100kVA P/L, Meter, NFB

* 주문시 CASE 색상 지정 가능
When ordering, you can select color of case

* 5~10kVA 는 상단부 I Bolt(행거)없음
5~10kVA don't have I Bolt(Hanger)