

# UL TYPE TRANSFORMER

WY3P42D-UL Series WT Type




## UL 인증



삼상 복관형으로 일반 전원 공급용 제품이며 전 규격을 인증 받아 신뢰성과 안전성을 동시에 확보한 제품입니다.

The product, which is a three phase isolation transformer general electric source, has been certified for its proven reliability and safety.

### •Circuit Diagram



• Not applied E(Shield) : 20KUL

### ● Standard & Approval

- UL 5085-1/2
- UL 1059(Terminal Block)
- IEC 61558


### ● Vectro Group : Dyn11

## ● Specifications


MODEL NO.	TYPE	SPECIFICATIONS		VA	DIMENSIONS (mm)										WEIGHT (kg)
		PRI.(V)	SEC.(V)		W	H	D	a	b	c	∅	E(≒)	M		
WY3P42D-500UL	WT	△	△N	0.5k	190	172	134	99	130	12	6.6 x 16	M4	M4	13.00	
WY3P42D-1KUL				1k	235	210	144	113.5	120	12	7 x 14.5	M4	M4	18.60	
WY3P42D-1.5KUL				1.5k	275	248	165	130	120	16	9 x 19	M4	M6	20.00	
WY3P42D-2KUL				2k	275	248	165	130	120	16	9 x 19	M4	M6	30.50	
WY3P42D-3KUL				3k	332	292	190	160	180	16	10.5 x 20.5	M4	M6	45.40	
WY3P42D-5KUL				5k	332	292	190	185	180	16	10.5 x 20.5	M4	M6	58.30	
WY3P42D-6KUL				6k	375	319.5	236	180	208	16	12 x 20	M4	M6	73.00	
WY3P42D-7.5KUL				7.5k	375	319.5	236	180	208	16	12 x 20	M4	M6	81.70	
WY3P42D-10KUL				10k	390	339	236	208	180	20	12 x 20	M4	M6	92.00	
WY3P42D-15KUL				15k	425	368	260	196	205	20	14 x 40	M4	M6	101.50	

※ 1차, 2차 전압은 주문시 선택  
※ 단자 치수 ("c", "M") 는 참조 사항으로 변경 될 수 있습니다.

## ● Dimension

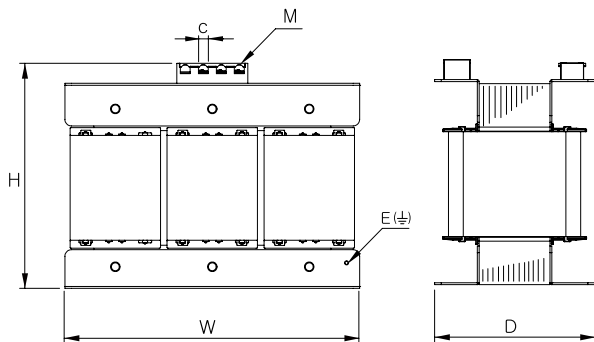

## ● Terminal



500VA~1kVA : Max 12.6, Min 4  
1.5kVA~7.5kVA : Max 17.2, Min 6  
10kVA~15kVA : Max 18.2, Min 6

트랜스포머  
REACTOR  
리액터  
무정전압블레이  
SSR  
전력조정기  
TPR  
스위칭파워  
SMP  
노이즈필터  
N/F  
하모닉필터  
H/F  
서지보호기  
SPD  
보호계전기  
RELAY  
E/LD=GF  
누전경보기  
영상변류기  
ZCT  
판넬메타  
METER  
계기용변성기  
CT=VT  
SHUNT=FA  
센트팬