

UL 인증



● Features

- Wide Band : High Attenuation
- Band Width : 150KHz ~ 30MHz
- Low Leakage
- RoHS Compliant
- Inverter Output Type : Model Type"C"
(WYFTH500T2C)
- WYFTH500T2A
: KC(HH03009-10001D) (Without "C" Type)
- UL Cer. No : E521164


● Specifications

* cUL Certification


ITEM	MODEL	SYMBOL	*WYFTH500T2A WYFTH500T2C
Rated Voltage	V		500
Rated Current	A		500
Frequency	Hz		50 / 60
Dielectric Withstand	V		2500VAC or 2800VDC for 1 minute(Line-Case)
Insulation Resistance	MΩ		500
Leakage Current	mA		18
Operating Temperature	°C		-25°C ~ +100°C [Refer to Derating Curve TYPE-2]
Operating Humidity	RH		35 ~ 85%RH
Weight	kg		9.5

* Derating Curve of page 519

● Circuit Diagram

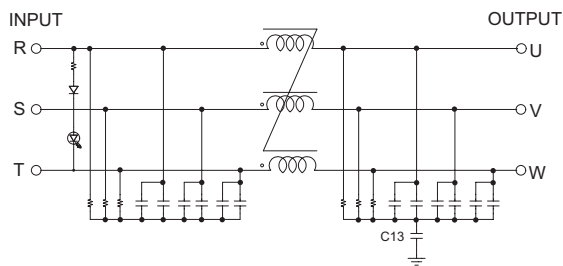

● Characteristics

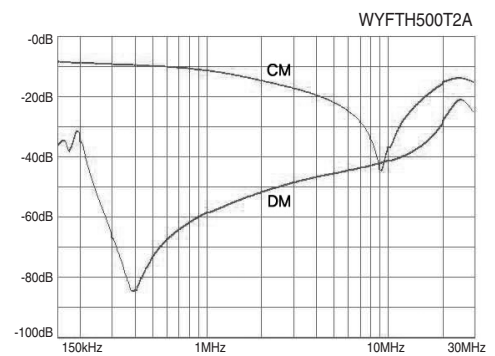

● Dimension

